




**PROTECTOR TERMAL - LIMITADOR**

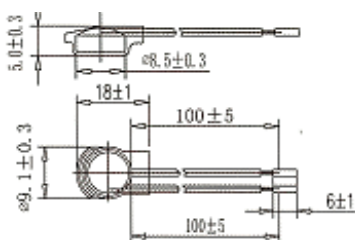

	Abierto	Cerrado
Temperatura nominal	60- 180°C	60 - 180°C
Tolerancia standard	±5K	±5K
maxima tension	500VAC 60VDC	500VAC 60VDC
Corriente de trabajo	250VAC 5A	250VAC 5A
vidas a 250VAC/3,0 A cos φ 1,0	10000	0
vidas a 250VAC/6,3 A cos φ 1,0	3000	0
vidas a 250VAC/4,0 A cos φ 0,45	1000	0
vidas a 250VAC/1,0 A cos φ 0,45	10000	0
contacto restistencia	<50mΩ	0
aislamiento tension	2KV	2KV
Largo	> 16mm	> 16mm
Diametro	< 9,2 mm	< 9,2 mm
Altura	< 5 mm2	< 5 mm2
normativa hilo	UL 10362 AWG22	UL 10362 AWG22
max temperatura hilo	200 °C	200 °C
tension operativa del hilo	2500 V	2500 V