


PROTECTOR TERMICO - REARMABLE

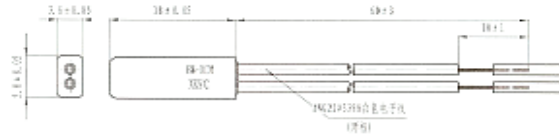

MODELO	TEMPERATURA ABERTURA	TEMPERATURA RESET	TENSION	CORRIENTE
BW-40°C	40 °C	≥ 27°C	24V - 250V	6A
BW-45°C	45 °C	≥ 30°C	24V - 250V	6A
BW-50°C	50°C	≥ 33°C	24V - 250V	6A
BW-55°C	55 °C	34-47 °C	24V - 250V	6A
BW-60°C	60 °C	35-50 °C	24V - 250V	6A
BW-65°C	65 °C	36-57 °C	24V - 250V	6A
BW-70°C	70 °C	38-60 °C	24V - 250V	6A
BW-75°C	75 °C	38-63 °C	24V - 250V	6A
BW-80°C	80 °C	55 ± 15°C	24V - 250V	6A
BW-85°C	85 °C	60 ± 15°C	24V - 250V	6A
BW-90°C	90 °C	65 ± 15°C	24V - 250V	6A
BW-95°C	95°C	70 ± 15°C	24V - 250V	6A
BW-100°C	100 °C	70 ± 15°C	24V - 250V	6A
BW-105°C	105 °C	75 ± 15°C	24V - 250V	6A
BW-110°C	110 °C	75 ± 15°C	24V - 250V	6A
BW-115°C	115 °C	80 ± 15°C	24V - 250V	6A
BW-120°C	120 °C	85 ± 15°C	24V - 250V	6A
BW-125°C	125 °C	90 ± 15°C	24V - 250V	6A
BW-130°C	130 °C	95 ± 15°C	24V - 250V	6A
BW-135°C	135 °C	100 ± 15°C	24V - 250V	6A
BW-140°C	140 °C	105 ± 15°C	24V - 250V	6A
BW-145°C	145 °C	105 ± 15°C	24V - 250V	6A

Tolerancia temperatura ± 5° C

Vida - 10,000 veces

se sirven con carcasa de plastico y carcasa metalica

tamaño pequeño para facilitar la instalacion