


Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

Effective Parameters irrespective of material grade (per set)

- Effective Length (L_e): 73.5mm
- Effective Area (A_e): 42.0mm²
- Effective Area (A_{Min}): 42.0mm²
- Effective Volume (V_e): 3087mm³


Approximate weight (without Gap): 15.8g/Set



EE2532 Un-gapped (OL)

Test Conditions: 1kHz/1mT/CFR COIL,N=100/25°C

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)/Set	P_v (W/set)	
CF196	2000 \pm 20%	1250 +30%/-20%	≤ 0.43 (200mT,16kHz,100°C)	
CF139	2100 \pm 20%	1300 +30%/-20%	≤ 0.31 (100mT,100kHz,100°C)	
CF297	2300 \pm 20%	1400 +30%/-20%	≤ 0.28 (100mT,100kHz,100°C)	
CF130	3000 \pm 20%	1800 +30%/-20%	≤ 0.46 (200mT,16kHz,100°C)	
CF195	5000 \pm 20%	2700 +30%/-20%	-	
CF197	7000 \pm 20%	3400 +30%/-20%	-	

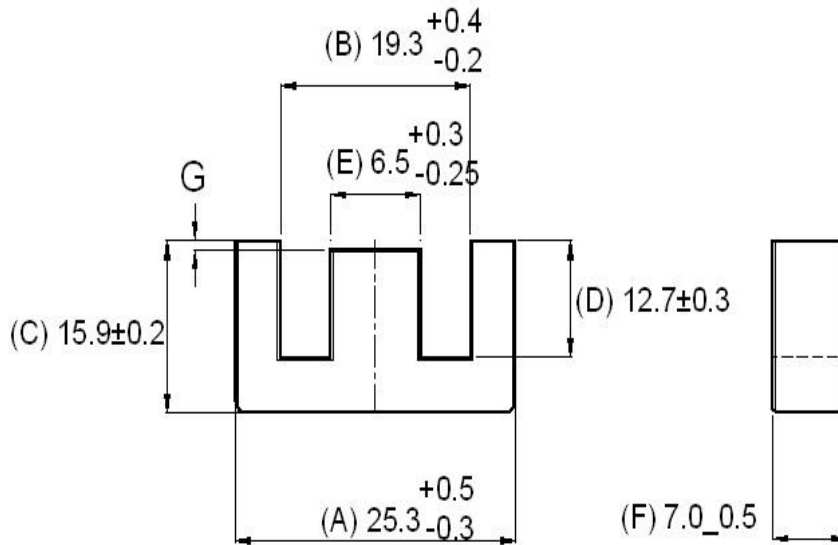

Remarks: Value of "G" is Zero (0) for Un-Gapped Cores, for Gapped Cores the value of "G" varies as per the Gap/AL value