


Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

Effective Parameters irrespective of material grade (per set)

- Effective Length (L_e): 66.4mm
- Effective Area (A_e): 113.2mm²
- Effective Area (A_{Min}): 110.5mm²
- Effective Volume (V_e): 7516mm³


Approximate weight (without Gap): 37.2g/Set



EE3213 Un-gapped (OL)

Test Conditions: 1kHz/1mT/CFR COIL,N=100/25°C

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)/Set	P_v (W/set)	
CF196	2000 \pm 20%	3500 +30%/-20%	$\leq 1.04(200mT, 16kHz, 100^\circ C)$	
CF139	2100 \pm 20%	3600 +30%/-20%	$\leq 0.75(100mT, 100kHz, 100^\circ C)$	
CF297	2300 \pm 20%	3800 +30%/-20%	$\leq 0.67(100mT, 100kHz, 100^\circ C)$	

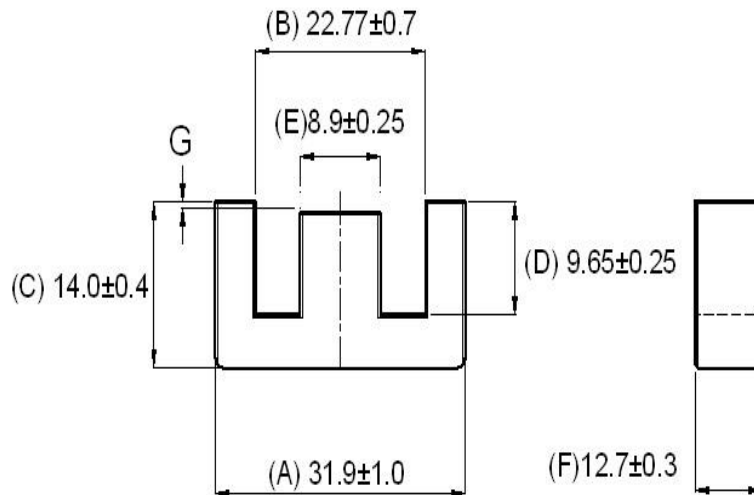

Remarks: Value of "G" is Zero (0) for Un-Gapped Cores, for Gapped Cores the value of "G" varies as per the Gap/AL value