


Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

Effective Parameters irrespective of material grade (per set)


- Effective Length (L_e): 204.0mm
 - Effective Area (A_e): 386.0mm²
 - Effective Area (A_{Min}): 371.8mm²
 - Effective Volume (V_e): 78690mm³
- Approximate weight (without Gap): 394g/Set**



EE7091 Un-gapped (OL)

Test Conditions: 1kHz/1mT/CFR COIL,N=20/25°C

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)/Set	P_v (W/set)	
CF196	2000 \pm 20%	4300 +30%/-20%	$\leq 10.86(200mT, 16kHz, 100^\circ C)$	
CF139	2100 \pm 20%	4500 +30%/-20%	$\leq 7.87(100mT, 100kHz, 100^\circ C)$	
CF297	3000 \pm 20%	4900 +30%/-20%	$\leq 7.08(100mT, 100kHz, 100^\circ C)$	

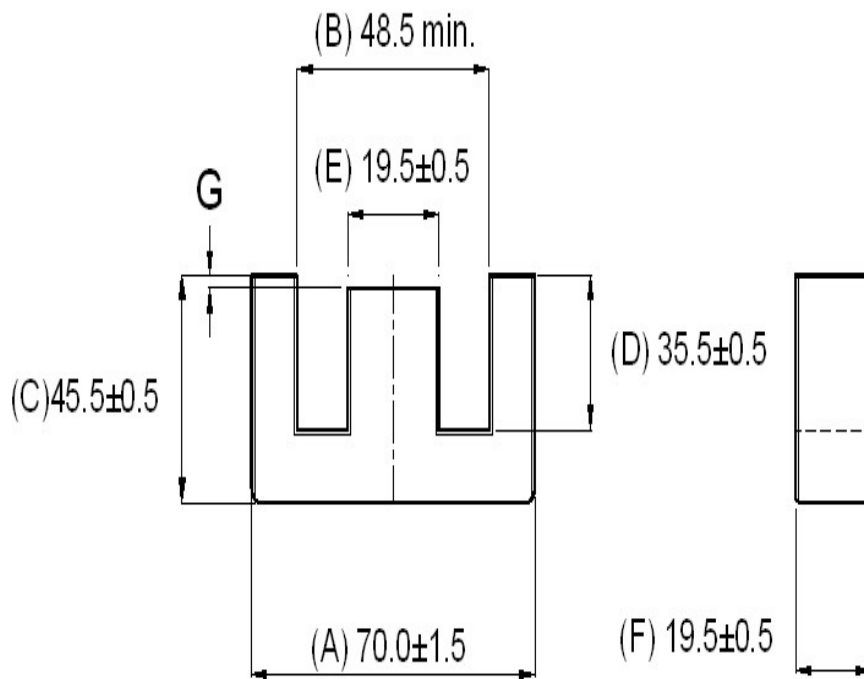

Remarks: Value of "G" is Zero (0) for Un-Gapped Cores, for Gapped Cores the value of "G" varies as per the Gap/AL value