


# H cores

H60X36X20

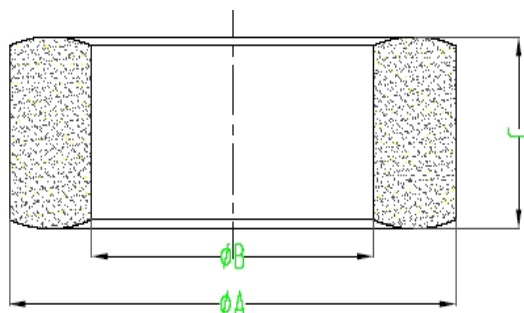

## CORE SETS

### CORE DIMENSIONS (mm)

Spray paint	Dimensions (mm)		
	$\phi A$	$\phi B$	C
Uncoat	$60.0 \pm 1.5$	$36.0 \pm 1.2$	$20.0 \pm 0.5$
Coat	$60.2 \pm 1.5$	$35.85 \pm 1.2$	$20.2 \pm 0.5$

### Effective core parameters

SYMBOL	PARAMETER	VALUE	UNIT
Ve	effective volume	33900.0	mm <sup>3</sup>
le	effective length	144.0	mm
Ae	effective area	235.0	mm <sup>2</sup>
Wt	mass of core set	≈188	g

### Characteristic

Grade	AL (nH/N <sup>2</sup> )	Z (Ω)
		f=1kHz U=0.25V N=10Ts, $\Phi 0.35$ mm
DN10H	200 ± 30%	40 min