


H cores

H12. 7X7. 14X4. 78P

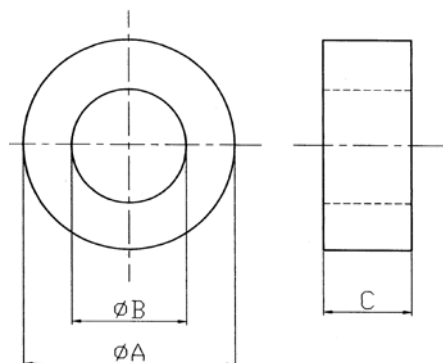

CORE SETS

CORE DIMENSIONS (mm)

Spray paint	Dimensions (mm)		
	ϕA	ϕB	C
Uncoat	12.7 ± 0.4	7.14 ± 0.3	4.78 ± 0.2
Coat	12.9 ± 0.4	7.0 ± 0.3	5.0 ± 0.2

Effective core parameters

SYMBOL	PARAMETER	VALUE	UNIT
Ve	effective volume	381.00	mm ³
le	effective length	29.50	mm
Ae	effective area	12.90	mm ²
Wt	mass of core set	≈ 2.2	g

Characteristic

Grade	AL (nH/N ²)	Z (Ω)
		f=100kHz U=0.25V N=10Ts, $\Phi 0.35$ mm
DN85H	$410 \pm 25\%$	20 min



Prodin Ferrite S.L.

CalleA, 27, 08620 Sant Vicenç dels Horts, Barcelona (Spain)

Tel.: +34 93 672 46 10

info@prodinferrite.com www.prodinferrite.com