



Core- I2620

PRODUCT DATA APPROVAL SHEET

Cosmo Ferrites Ltd. INDIA

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

Effective Parameters irrespective of material grade (per piece)

Effective Length (Le): mm

Effective Area (Ae): mm<sup>2</sup>

Effective Area (AMin): mm<sup>2</sup>


Effective Volume (Ve): mm<sup>3</sup>

Approximate weight: 350 g/pc



I12620 (OL)

Material Grade	Initial Permeability ( $\mu_{iac}$ )
CF292	1800 $\pm$ 20%
CF139	2100 $\pm$ 20%
CF297	2300 $\pm$ 20%

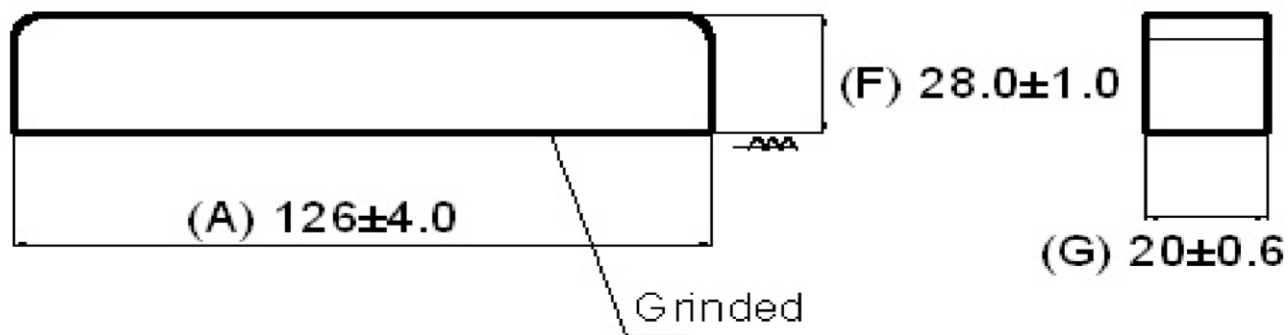

**Prodin Ferrite S.L.**

Calle A, 27, 08620 Sant Vicenç dels Horts, Barcelona (Spain)

Tel.: +34 93 672 46 10

[info@prodinferrite.com](mailto:info@prodinferrite.com)

[www.prodinferrite.com](http://www.prodinferrite.com)