


Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

Effective Parameters irrespective of material grade (per set)



- Effective Length (L_e): mm
- Effective Area (A_e): mm²
- Effective Area (A_{Min}): mm²
- Effective Volume (V_e): mm³

Approximate weight: 76g/pc



I2830 (OL)

Material Grade	Initial Permeability (μ_{iac})	Ordering code
CF139	2100 ±20%	CF139I2830

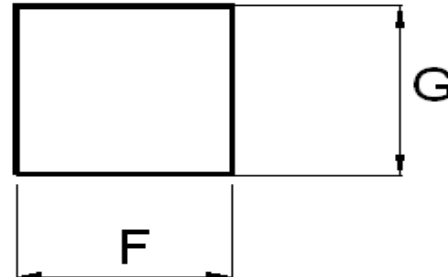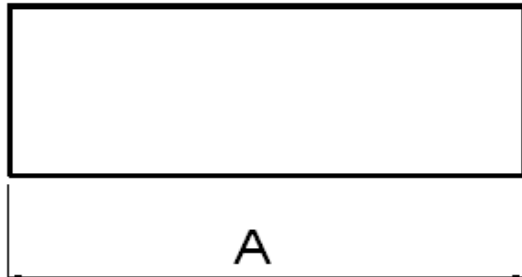

REMARKS: ONLY TWO FACES TO BE GRIND.

Dimensions :

Dimension	Nominal (in mm)	Maximum (in mm)	Minimum (in mm)
A	30.0	30.4	29.6
F	28.0	28.4	27.6
G	18.5	18.7	18.3

For Cosmo Ferrites Limited-INDIA

Checked By: A.K.

Approved By: B.S.

Authorized By: KSR

Date: 10-09-2014 (ISSUE NO.1)

Customer's Approval

Authorized Signatory:

Name:

Date: