



PRODUCT DATA APPROVAL SHEET

Core- I6015G6

Cosmo Ferrites Ltd.

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards. **Effective Parameters irrespective of material grade (per set) Approximate weight (without Gap): 62.0g/Pc.**




I6015G6

Material Grade	Initial Permeability (μ_{iac})
CF139	2100 \pm 20%
CF297	2300 \pm 20%

Delivery Procedure : ALL faces to be ground.

Dimensions :

Dimension	Nominal (in mm)	Maximum (in mm)	Minimum (in mm)
A	59.5	60.3	58.7
F	15.25	15.75	14.75
G	15.25	15.75	14.75

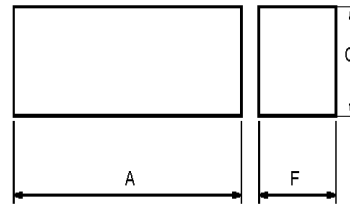

Prodin Ferrite S.L.

Calle A, 27, 08620 Sant Vicenç dels Horts, Barcelona (Spain)

Tel.: +34 93 672 46 10

info@prodinferrite.com www.prodinferrite.com