

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

## Combination of UI9320 :


Parameter	Value	Unit
Effective Length ( $L_e$ ):	258.0	mm
Effective Area ( $A_e$ ):	560.0	mm <sup>2</sup>
Effective Area ( $A_{min}$ ):	560.0	mm <sup>2</sup>
Effective Volume ( $V_e$ ):	144000	mm <sup>3</sup>
Approximate weight(m):	750	g/set



## I9320 G6 (OL)

Test Conditions: 1kHz/1mT/CFR COIL, N=100/25°C

Material Grade	Initial Permeability ( $\mu_{iac}$ )	AL Value (nH)/Set Combination UI9320	$\mu_e$ Approx./Set	$P_V$ (W/set) Combination UI9320 (25kHz,200mT, 100°C)	$P_V$ (W/set) Combination UI9320 (100kHz,100mT, 100°C)	
CF139	2100±20%	5000 +30%/-20%	≈1800	≤14.40	≤17.28	

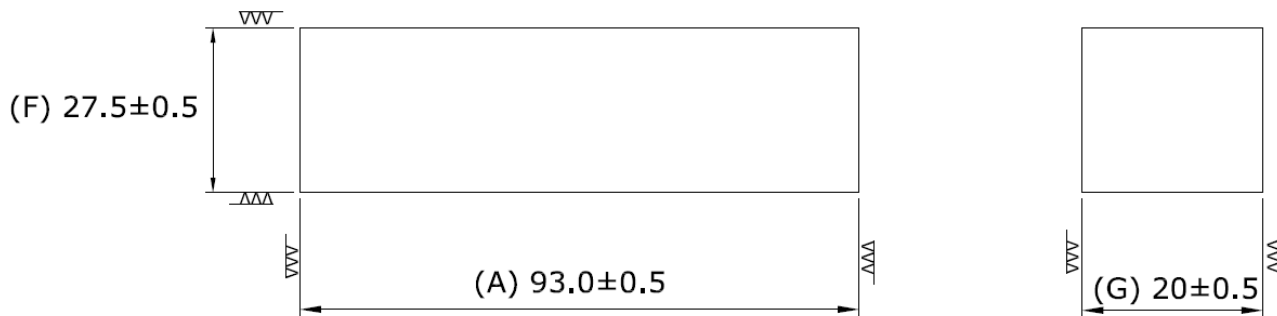

NOTE : 1. ALL SIDES GRINDING