

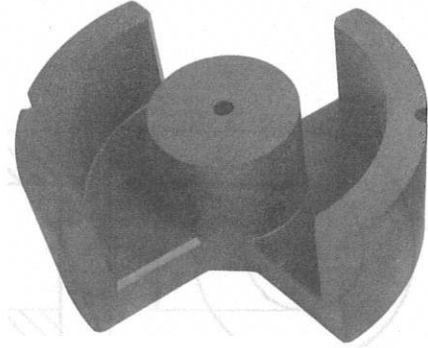
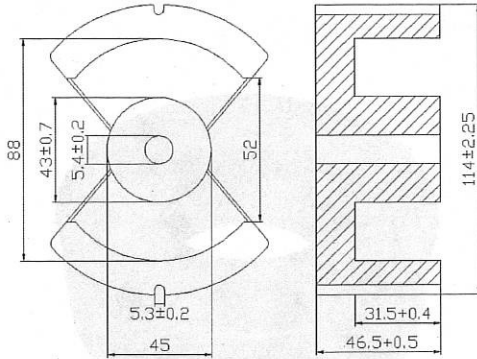


PM114

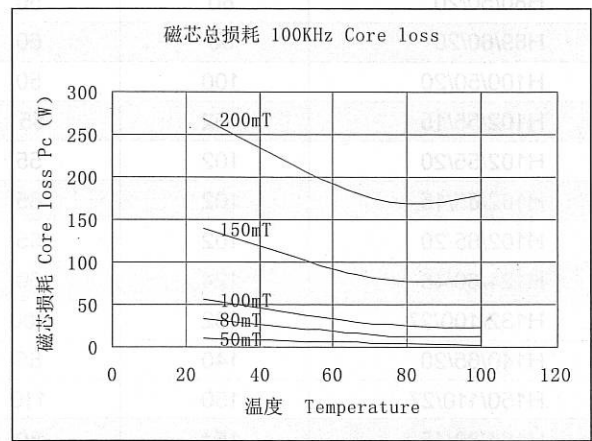

Parameter (参数)	Symbol (标示)	Value (数据)	Unit (单位)
Core constant (磁芯常数)	C1	0.132	mm ⁻¹
Effective path length (有效长度)	Le	198	mm
Effective area (有效截面积)	Ae	1428	mm ²
Effective volume (有效体积)	Ve	425098	mm ³
Inductance factor (电感因数)	AL	18920	nH/N ²
Weight of set (重量)	W	2040	g
Other name (其它名称)	PM114/93		
Product code (产品编码)	S/N		

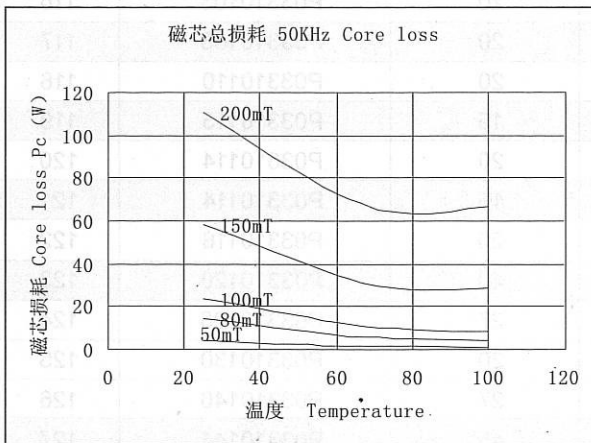

Circuit Type (电路类型)	Calculated Output Power (最大可能输出功率) Unit (单位): W			
	Switching Frequency (工作频率)			
	20KHz	50KHz	100KHz	250KHz
Push-pull converter (推挽式电路)	13110	21304	29497	57343
Flyback converter (反激, 回扫电路)	4370	7101	9832	19114
Forward converter (正激, 拓扑电路)	6555	10652	14748	28671



Prodin Ferrite S.L.

CalleA, 27, 08620 Sant Vicenç dels Horts, Barcelona (Spain)

Tel.: +34 93 672 46 10

info@prodinferrite.com www.prodinferrite.com