

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards. Effective Parameters irrespective of material grade (per piece)

Effective Length (L_e): 17.4 mm

Effective Area (A_e): 7.5mm²

Effective Area (A_{Min}): 7.5mm²

Effective Volume (V_e): 131mm³

Approximate weight : 0.8g/pc




T0804 OL (Un- Coated)

Test Conditions: 10kHz/150mV/CFR COIL,N=01/Lo=Zero/25°C

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)
CF196	2000 \pm 20%	1100+30%/-20%
CF139	2100 \pm 20%	1150+30%/-20%
CF130	3000 \pm 20%	1600+30%/-20%
CF195A	5000 \pm 20%	2700+30%/-20%
CF265	5000 \pm 20%	2700+30%/-20%
CF190	6000 \pm 20%	3250+30%/-20%
CF197	7000 \pm 20%	3800+30%/-20%
CF199	9000 \pm 20%	4900 \pm 30%

Dimensions(Un-coated Core)

Dimension	Nominal (in mm)	Maximum (in mm)	Minimum (in mm)
A	8.0	8.3	7.7
B	4.0	4.2	3.8
C	4.0	4.2	3.8

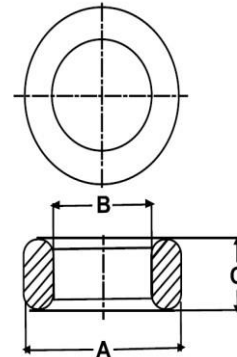

Prodin Ferrite S.L.

Calle A, 27, 08620 Sant Vicenç dels Horts, Barcelona (Spain)

Tel.: +34 93 672 46 10

info@prodinferrite.com www.prodinferrite.com