

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards. Effective Parameters irrespective of material grade (per piece)

- Effective Length (L_e): 152.4 mm
- Effective Area (A_e): 51.9mm²
- Effective Area (A_{Min}): 51.9mm²
- Effective Volume (V_e): 7920mm³
Approximate weight : 39.5g/pc




T5806OL (Un- Coated)

Test Conditions: 10kHz/150mV/CFR COIL,N=01/Lo=Zero/25°C

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)
CF196	2000 \pm 20%	850+30%/-20%
CF139	2100 \pm 20%	900+30%/-20%
CF130	3000 \pm 20%	1300+30%/-20%
CF195A	5000 \pm 20%	2100+30%/-20%
CF265	5000 \pm 20%	2100+30%/-20%
CF190	6000 \pm 20%	2600+30%/-20%
CF197	7000 \pm 20%	3000+30%/-20%
CF199	9000 \pm 20%	3850 \pm 30%

Dimensions(Un-coated Core)

Dimension	Nominal (in mm)	Maximum (in mm)	Minimum (in mm)
A	58.3	59.3	57.3
B	40.8	41.6	40.0
C	6.0	6.4	5.6

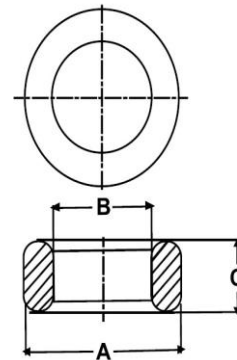

Prodin Ferrite S.L.

Calle A, 27, 08620 Sant Vicenç dels Horts, Barcelona (Spain)

Tel.: +34 93 672 46 10

info@prodin ferrite.com

www.prodin ferrite.com