




**TB25**

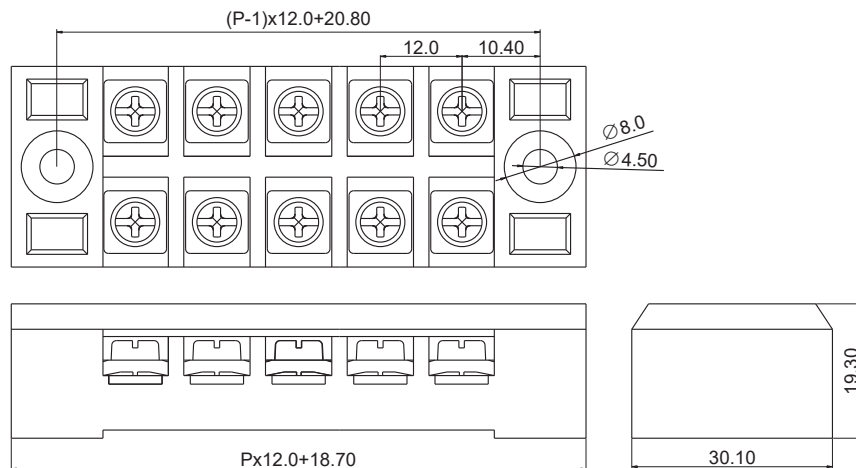

**Electrical**

Rated voltage

600V

Rated current

25A

Wire range

22-12 AWG

Withstanding voltage

AC2000V/1Min

**Mechanical**

Torque

9.0kg.cm

Temp range

-30°C—+120°C

**Dimention**

Pitch

12.0mm

Poles

2P-24P

**MATERIAL**

Housing

PBT UL94V-0


Contact

Steel, Ni plated

Screw

M4.0 Steel, Ni plated

订购方式:

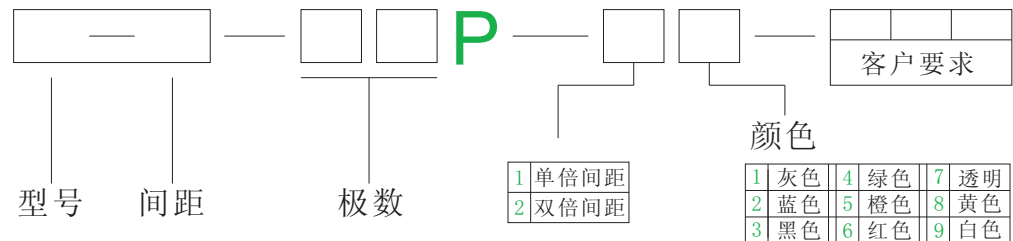

mm  
(INCH)



THIROANGIF PROJECTION

**NAME TB25**