








EFD Ferrite Core Coil Bobbins

MILES · PLATTS



EFD 15



EFD15H1S08IS-00



Coil Former	
Coil former material	Phenolformaldehyde (PF), glass reinforced, flame retardant in accordance with "UL 94V-0"; UL file number E41429 (M)
Resistance to soldering heat	"IEC 60068-2-20", Part 2, Test Tb, method 1B, 350 deg. C, 3.5 s
Pin material	0.60 Dia. copper clad steel wire (ASTM.B.227) - Tin (Sn) plated
Solderability	"IEC 60068-2-20", Part 2, Test Ta, method 1, 235 deg. C, 2 s
Pin pull out force	1.5 Kg Minimum
Part number	EFD15H1S08IS-00



Dimensions in millimetres



Prodin Ferrite S.L.

Calle A, 27, 08620 Sant Vicenç dels Horts, Barcelona (Spain)

Tel.: +34 93 672 46 10

info@prodinferrite.com www.prodinferrite.com




EFD Ferrite Core Coil Bobbins

EFD 15



EFD15COVERM-03

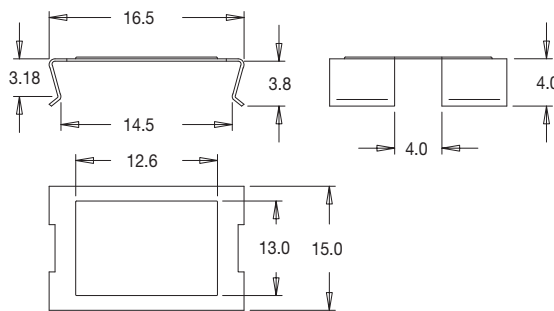


Mounting Cover	
Clip material	Stainless steel
Part No.	EFD15COVERM-03

Dimensions in millimetres

EFD 15



EFD15CLIPM-00

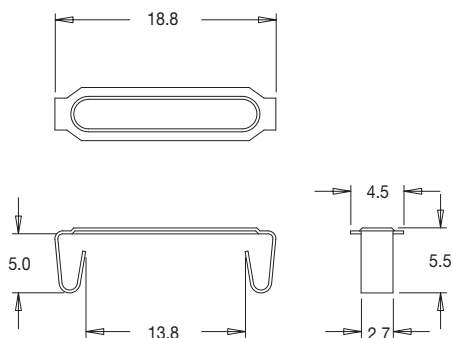

Mounting Clip	
Clip material	Stainless steel
Part No.	EFD15CLIPM-00


Dimensions in millimetres



EFD Ferrite Core Coil Bobbins

MILES · PLATTS

EFD 20

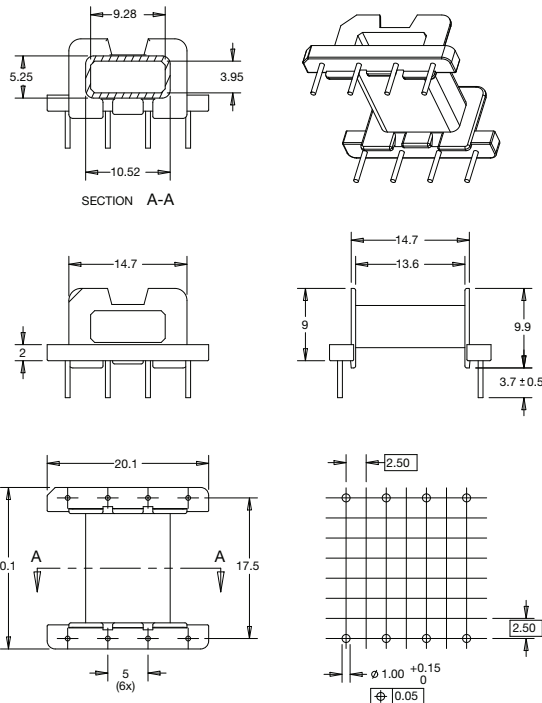

Coil Former	
Coil former material	Phenolformaldehyde (PF), glass reinforced, flame retardant in accordance with "UL 94V-0"; UL file number E41429 (M)
Resistance to soldering heat	"IEC 60068-2-20", Part 2, Test Tb, method 1B, 350 deg. C, 3.5 s
Pin material	0.60 Dia. copper clad steel wire (ASTM.B.227) - Tin (Sn) plated
Solderability	"IEC 60068-2-20", Part 2, Test Ta, method 1, 235 deg. C, 2 s
Pin pull out force	1.5 Kg Minimum
Part number	EFD20H1S08IS-00

Dimensions in millimetres


EFD 20



EFD20COVERM-02

Mounting Cover	
Clip material	Steel
Part No.	EFD20COVERM-02

Dimensions in millimetres

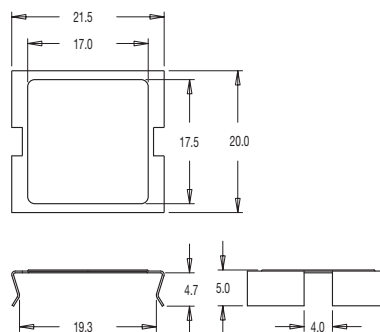


EFD 20



EFD20CLIPM-00

Mounting Clip	
Clip material	Steel
Part No.	EFD20CLIPM-00

Dimensions in millimetres

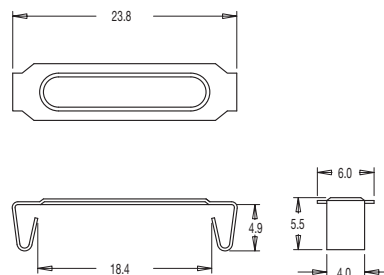








EFD Ferrite Core Coil Bobbins

MILES · PLATTS



EFD 25

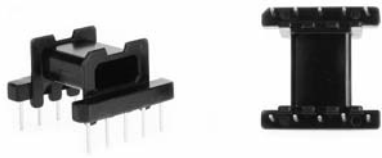

EFD25H1S10IS-00



Coil Former	
Coil former material	Phenolformaldehyde (PF), glass reinforced, flame retardant in accordance with "UL 94V-0"; UL file number E59481 (S)
Resistance to soldering heat	"IEC 60068-2-20", Part 2, Test Tb, method 1B, 350 deg. C, 3.5 s
Pin material	0.80 Dia. copper clad steel wire (ASTM.B.227) - Tin (Sn) plated
Solderability	"IEC 60068-2-20", Part 2, Test Ta, method 1, 235 deg. C, 2 s
Pin pull out force	1.5 Kg Minimum
Part number	EFD25H1S10IS-00




Dimensions in millimetres


EFD 25



EFD25CLIPM-00



Mounting Clip	
Clip material	Steel
Part No.	EFD25CLIPM-00

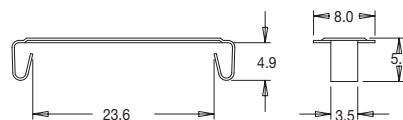


Dimensions in millimetres




EFD Ferrite Core Coil Bobbins

MILES · PLATTS

EFD 30

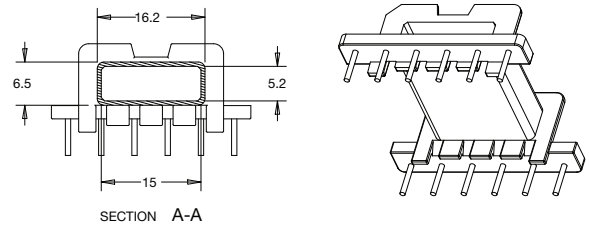

Coil Former	
Coil former material	Phenolformaldehyde (PF), glass reinforced, flame retardant in accordance with "UL 94V-0"; UL file number E41429 (M)
Resistance to soldering heat	"IEC 60068-2-20", Part 2, Test Tb, method 1B, 350 deg. C, 3.5 s
Pin material	0.80 Dia. copper clad steel wire (ASTM.B.227) - Tin (Sn) plated
Solderability	"IEC 60068-2-20", Part 2, Test Ta, method 1, 235 deg. C, 2 s
Pin pull out force	1.5 Kg Minimum
Part number	EFD30H1S12IS-00

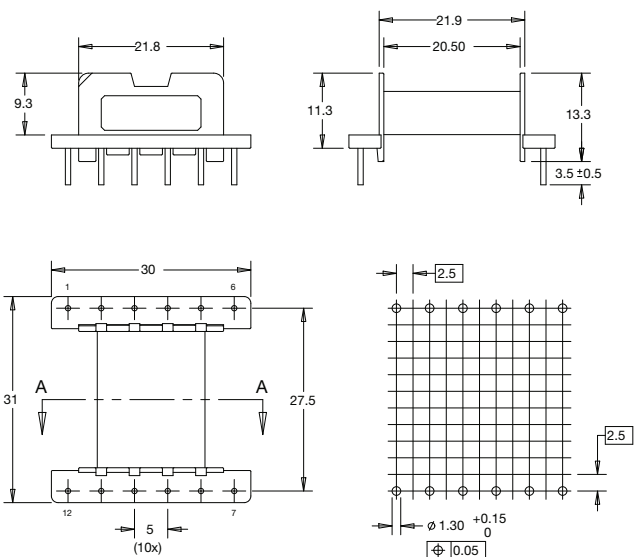


Dimensions in millimetres


EFD 30



EFD30CLIPM-00



Mounting Clip	
Clip material	Steel
Part No.	EFD30CLIPM-00

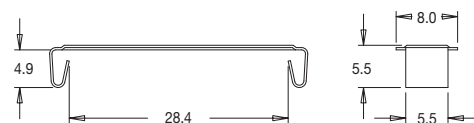

Dimensions in millimetres