SPECIFICATION FOR APPROVAL

1.Material

Production:	Iron Powder Cores
KDM.P/N:	KT300–26D
A_L:	160(nH/N^2) ± 10%
Material:	–26
Coating Color:	Yellow/White
Coating material:	epoxy
Coating Breakdown Voltage:	800Vrms.0.5mA. 2sec

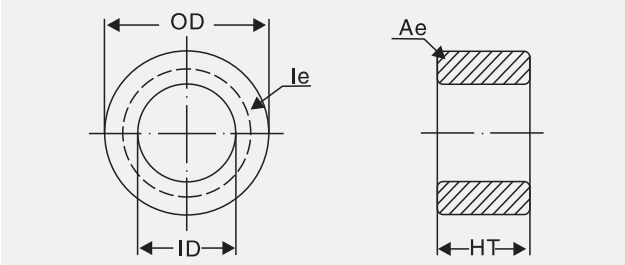

2.Physical Characteristics

After Coating			ℓ_e (cm)	A_e (cm^2)	V (cm^3)	W (cm^2)	Weight	Box Quantity (Pieces)
OD mm	ID mm	Ht mm						
77.20 ± 0.75	49.0 ± 0.75	25.40 ± 0.75	19.800	3.380	67.000	18.850	499.0g	36

3.Electrical Parameters(Typical) Temperature(25℃ ± 2℃)

Test Item	Test Condition	Value(Typical)
Inductance	ϕ 0.29mm/10Ts, 10kHz/1V, I_{DC}=0A	16.0 μ H ± 10%
DC–Bias	ϕ 0.5mm/113Ts, 10kHz/1V, L(7A)/L(0A) × 100%(H_{DC}=50Oe)	46%(Min.)
Core Loss	100kHz/140Gs	96mW/cm^3(Max.)
Q	ϕ 0.29mm/10Ts, 200kHz/1V, I_{DC}=0A	6.0(Min.)
Remarks		

DC–Bias Curves(Typical)

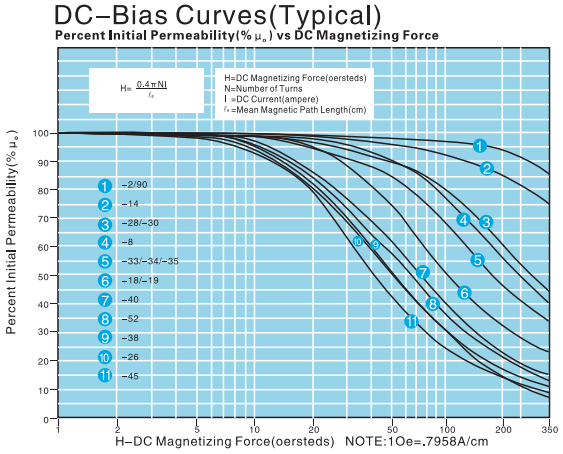

Core Loss Curves(Typical)

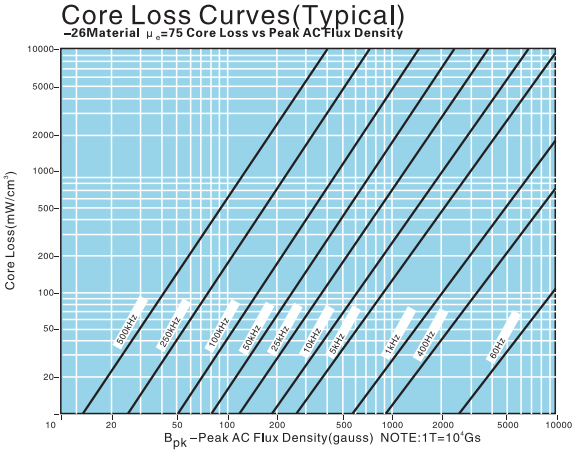

Prodin Ferrite S.L.

Calle A, 27, 08620 Sant Vicenç dels Horts, Barcelona (Spain)
Tel.: +34 93 672 46 10
info@prodinferrite.com www.prodinferrite.com