


SPECIFICATION FOR APPROVAL

1. Material

Production:	Iron Powder Cores
KDM.P/N:	KT650-8
A_L :	$200(\text{nH}/\text{N}^2) \pm 10\%$
Material:	-8
Coating Color:	Yellow/Red
Coating material:	epoxy
Coating Breakdown Voltage:	800Vrms.0.5mA.2sec

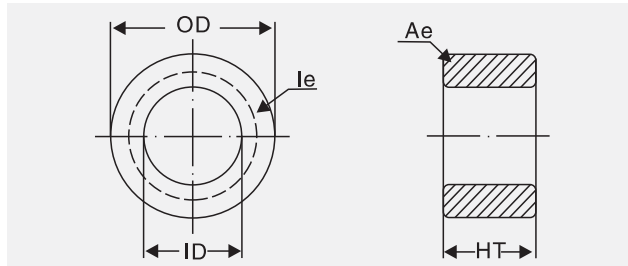


2. Physical Characteristics

After Coating			ℓ_e (cm)	A_e (cm ²)	V (cm ³)	W (cm ²)	Weight	Box Quantity (Pieces)
OD mm	ID mm	Ht mm						
165.0 ± 1.25	88.9 ± 1.25	50.8 ± 1.25	39.900	18.400	734.00	62.040	4923g	1


3. Electrical Parameters(Typical) Temperature(25°C ± 2°C)

Test Item	Test Condition	Value(Typical)
Inductance	ϕ 0.29mm/20Ts, 10kHz/1V, $I_{DC}=0A$	80.00 μ H ± 10%
DC-Bias	ϕ 0.5mm/159Ts, 10kHz/1V, L(10A)/L(0A) × 100%($H_{DC}=50Oe$)	82%(Min.)
Core Loss	250kHz/100Gs	55mW/cm ³ (Max.)
Q	ϕ 0.29mm/20Ts, 200kHz/1V, $I_{DC}=0A$	25.0(Min.)
Remarks		

DC-Bias Curves(Typical)

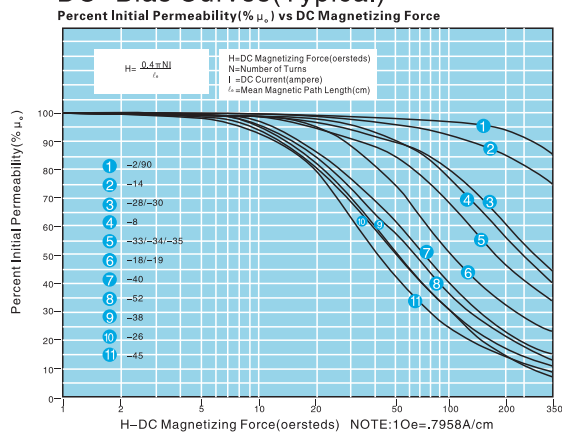

Core Loss Curves(Typical)

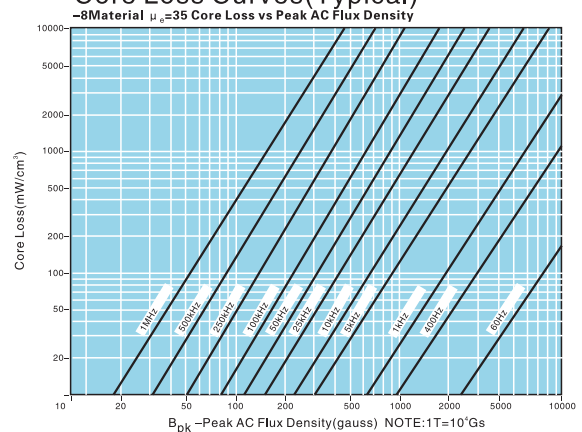

Prodin Ferrite S.L.

CalleA, 27, 08620 Sant Vicenç dels Horts, Barcelona (Spain)

Tel.: +34 93 672 46 10

info@prodinferrite.com www.prodinferrite.com