




# RM Ferrite Core Coil Bobbins

# MILES · PLATTS


## RM 6

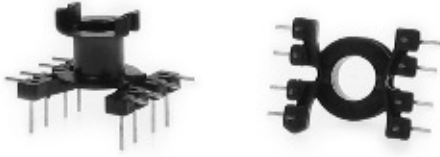

RM06V1S08LP-00

<b>Coil Former</b>	
<b>Coil former material</b>	Polyethylene terephthalate (PET), glass reinforced, flame retardant in accordance with "UL 94V-0"; UL file number E69578 (M)
<b>Resistance to soldering heat</b>	"IEC 60068-2-20", Part 2, Test Tb, method 1B, 350 deg. C, 3.5 s
<b>Pin material</b>	0.60 Dia. copper clad steel wire (ASTM.B.227) - Tin (Sn) plated
<b>Solderability</b>	"IEC 60068-2-20", Part 2, Test Ta, method 1, 235 deg. C, 2 s
<b>Pin pull out force</b>	1.0 Kg Minimum
<b>Part number</b>	RM06V1S08LP-00

Dimensions in millimetres

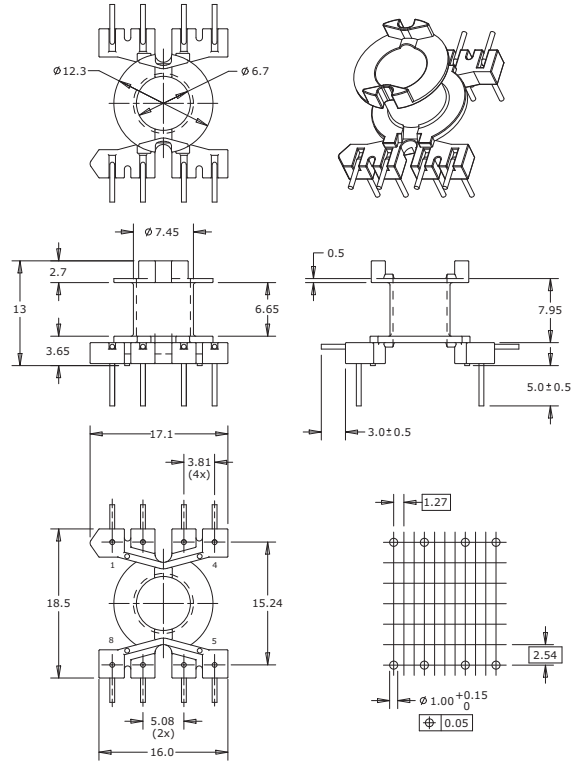


## RM 8



RM08V1S12LP-00

<b>Coil Former</b>	
<b>Coil former material</b>	Polyethylene terephthalate (PET), glass reinforced, flame retardant in accordance with "UL 94V-0"; UL file number E69578 (M)
<b>Resistance to soldering heat</b>	"IEC 60068-2-20", Part 2, Test Tb, method 1B, 350 deg. C, 3.5 s
<b>Pin material</b>	20.64 Sq. copper clad steel wire (ASTM.B.227) - Tin (Sn) plated
<b>Solderability</b>	"IEC 60068-2-20", Part 2, Test Ta, method 1, 235 deg. C, 2 s
<b>Pin pull out force</b>	1.5 kg Minimum
<b>Part number</b>	RM08V1S12LP-00

Dimensions in millimetres

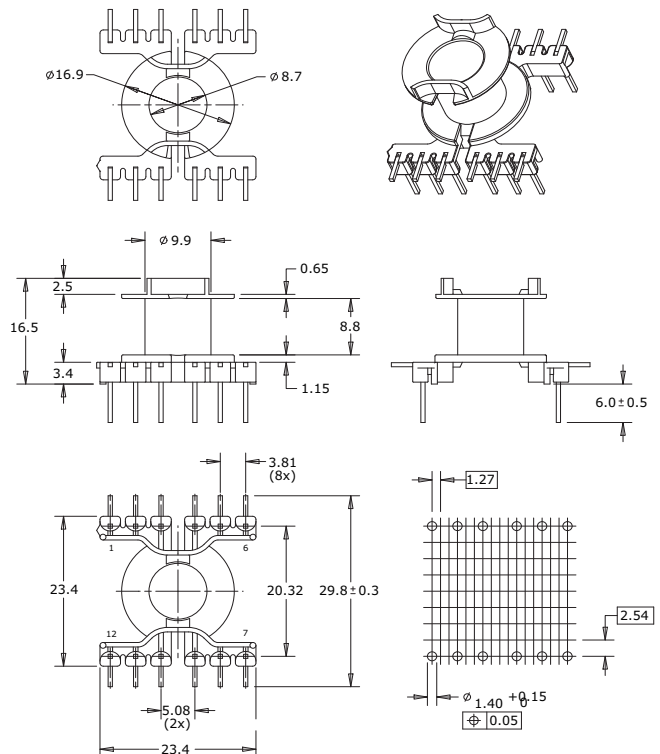

### Prodin Ferrite S.L.

Calle A, 27, 08620 Sant Vicenç dels Horts, Barcelona (Spain)

Tel.: +34 93 672 46 10


[info@prodinferrite.com](mailto:info@prodinferrite.com) [www.prodinferrite.com](http://www.prodinferrite.com)




# RM Ferrite Core Coil Bobbins

**MILES · PLATTS**

## RM 10

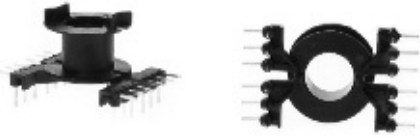


RM10V1S12LP-00

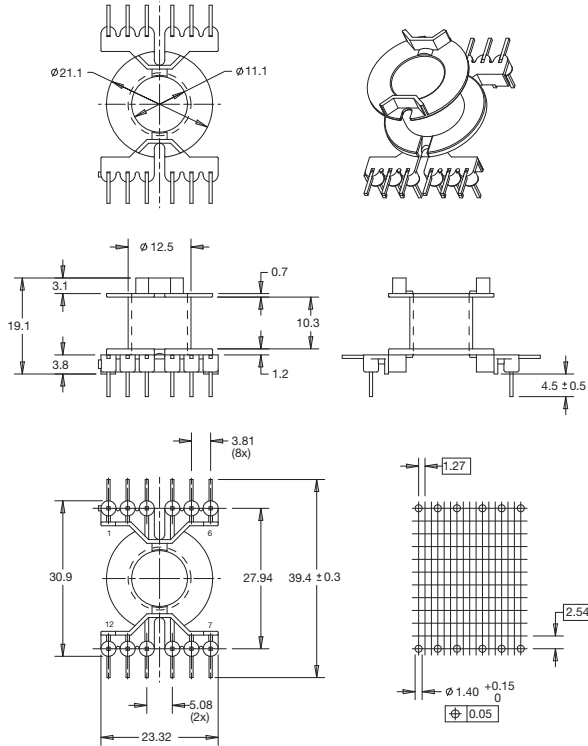


<b>Coil Former</b>	
<b>Coil former material</b>	Polyethylene terephthalate (PET), glass reinforced, flame retardant in accordance with "UL 94V-0"; UL file number E69578 (M)
<b>Resistance to soldering heat</b>	"IEC 60068-2-20", Part 2, Test Tb, method 1B, 350 deg. C, 3.5 s
<b>Pin material</b>	0.64 Sq. copper clad steel wire (ASTM.B.227) - Tin (Sn) plated
<b>Solderability</b>	"IEC 60068-2-20", Part 2, Test Ta, method 1, 235 deg. C, 2 s
<b>Pin pull out force</b>	1.5 Kg Minimum
<b>Part number</b>	RM10V1S12LP-00

Dimensions in millimetres

## RM 12

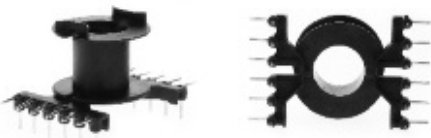

RM12V1S12LP-00

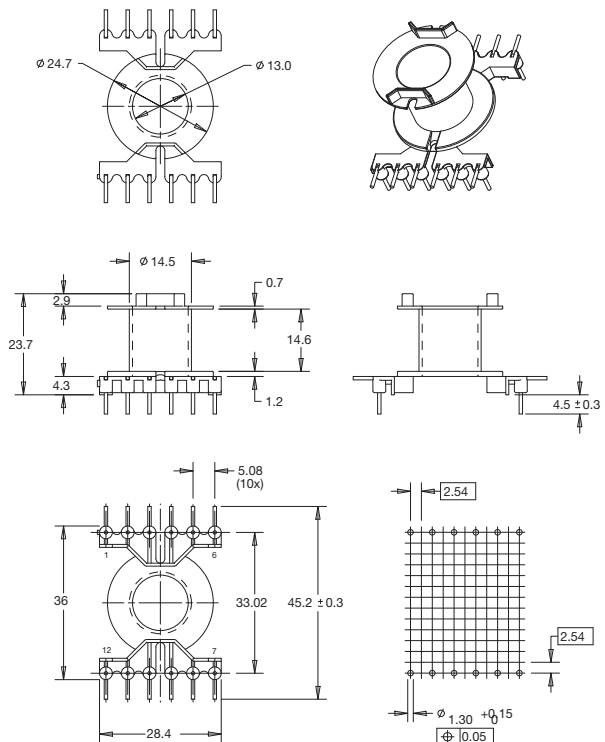

<b>Coil Former</b>	
<b>Coil former material</b>	Polyethylene terephthalate (PET), glass reinforced, flame retardant in accordance with "UL 94V-0"; UL file number E69578 (M)
<b>Resistance to soldering heat</b>	"IEC 60068-2-20", Part 2, Test Tb, method 1B, 350 deg. C, 3.5 s
<b>Pin material</b>	0.80 Dia. copper clad steel wire (ASTM.B.227) - Tin (Sn) plated
<b>Solderability</b>	"IEC 60068-2-20", Part 2, Test Ta, method 1, 235 deg. C, 2 s
<b>Pin pull out force</b>	1.5 Kg Minimum
<b>Part number</b>	RM12V1S12LP-00

Dimensions in millimetres



**Prodin Ferrite S.L.**

Calle A, 27, 08620 Sant Vicenç dels Horts, Barcelona (Spain)

Tel.: +34 93 672 46 10

[info@prodinferrite.com](mailto:info@prodinferrite.com) [www.prodinferrite.com](http://www.prodinferrite.com)



MILES · PLATTS

# RM Ferrite Core Coil Bobbins


## RM 14



RM14V1S12LP-00

<b>Coil Former</b>	
<b>Coil former material</b>	Polyethylene terephthalate (PET), glass reinforced, flame retardant in accordance with "UL 94V-0"; UL file number E69578 (M)
<b>Resistance to soldering heat</b>	"IEC 60068-2-20", Part 2, Test Tb, method 1B, 350 deg. C, 3.5 s
<b>Pin material</b>	0.80 Sq. copper clad steel wire (ASTM.B.227) - Tin (Sn) plated
<b>Solderability</b>	"IEC 60068-2-20", Part 2, Test Ta, method 1, 235 deg. C, 2 s
<b>Pin pull out force</b>	1.5 Kg Minimum
<b>Part number</b>	RM14V1S12LP-00

Dimensions in millimetres

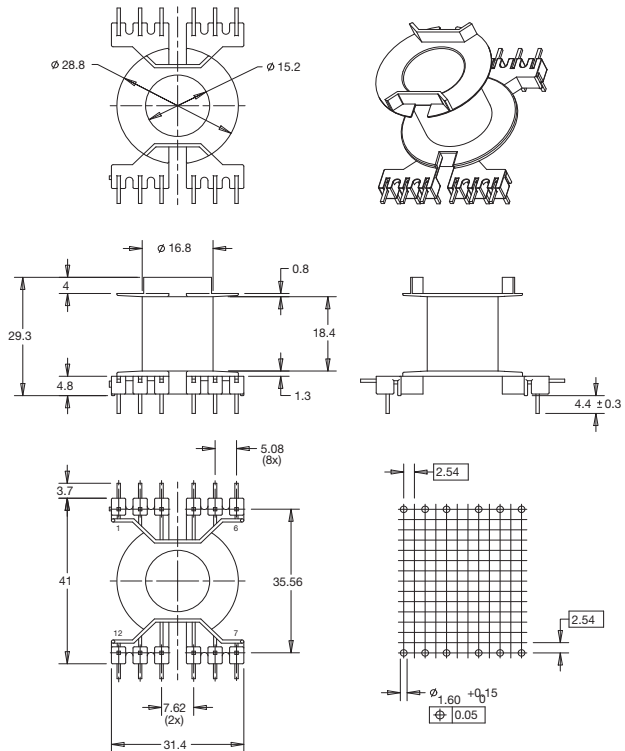

**Prodin Ferrite S.L.**

Calle A, 27, 08620 Sant Vicenç dels Horts, Barcelona (Spain)

Tel.: +34 93 672 46 10

[info@prodinferrite.com](mailto:info@prodinferrite.com) [www.prodinferrite.com](http://www.prodinferrite.com)