

Electrical

Rated voltage

600V

Rated current

150A

Wire range

8-1/0 AWG

Withstanding voltage

AC3500V/1Min

Mechanical

Torque

6. 0N. m (70. 8Lb-in)

Temp range

-40°C - +120°C

Dimention

Pitch

25. 0mm

Poles

1P-x xP

MATERIAL

Housing

PC UL94V-0


Pin header

Copper, Tin plated

Screw

M8 Steel, Zine plated

订购方式:

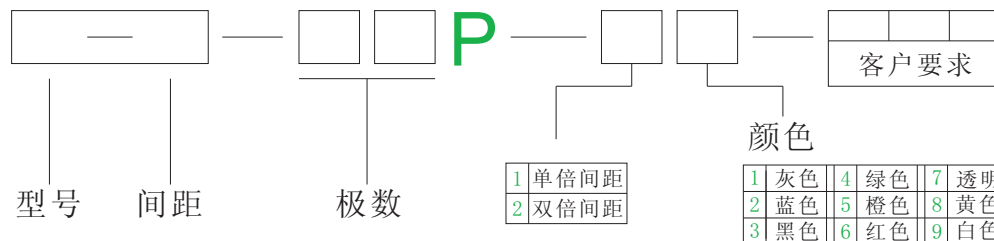

mm
(INCH)



THIROANGIF PROJECTION

NAME

TD100-DG