

Electrical

Rated voltage

600V

Rated current

65A

Wire range

18-4 AWG

Withstanding voltage

AC3500V/1Min

Mechanical

Torque

3. 0N. m (26. 6Lb-in)

Temp range

-40°C - +120°C

Dimention

Pitch

19. 0mm

Poles

1P-x xP

MATERIAL

Housing

PC UL94V-0


Pin header

Brass, Tin plated

Screw

M6 Steel, Zine plated

订购方式:

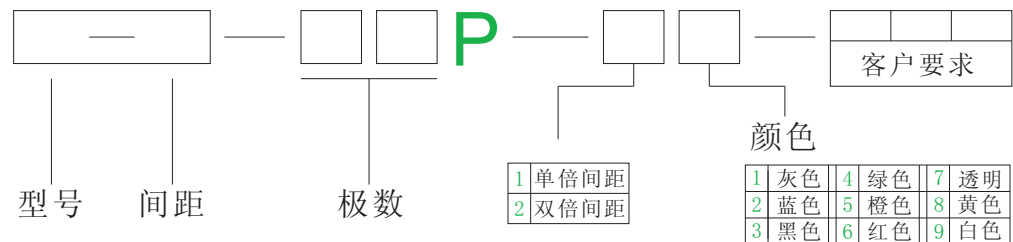

mm
(INCH)



NAME

TD60-DG