

Cat No:

Cat No:

- 304 190 P
- 304 199 P
- 304 191 P

- 304 490 P
- 304 499 P
- 304 491 P



Electrical Ratings
CE (EN 60947-7-1)
UL - CuLus
VDE (IEC 60947-7-1)
CSA
ATEX


Voltage, V ~	Current, A	Cross-Section
750	192	70 mm ²
1000	175	AWG 6-2/0


Voltage, V ~	Current, A	Cross-Section
1000	192	70 mm ²
1000	175	AWG 6-2/0

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, (min.-max.)
AWG Conductor
Insulation Stripping Length (min.-max.)
Torque (min.-max.)
Screwdriver

16-70 mm ²
16-70 mm ²
16-25 mm ²
AWG 6-2/0
22-24 mm
6-12 Nm
S 6 (DIN 6911)

16-70 mm ²
16-70 mm ²
16-25 mm ²
AWG 6-2/0
22-24 mm
6-12 Nm
S 6 (DIN 6911)

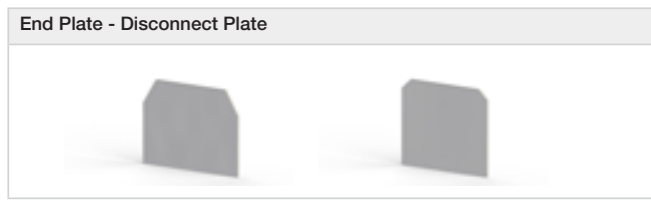

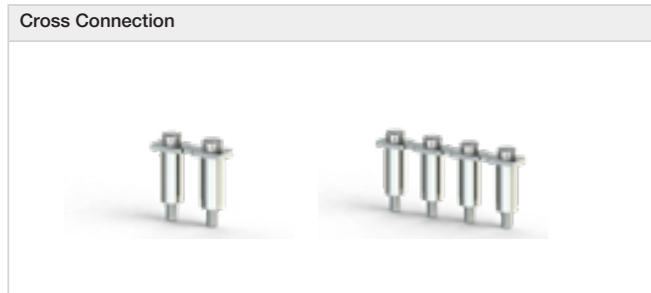

Type	Cat.No.	Qty.
UK 70/2	478 372	5
UK 70/3	478 373	5
UK 70/4	478 374	5

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

8/3
1/A11
IP 20 / -
D-NS 12x10, DG 10/10

8/3
1/A11
IP 20 / -
D-NS 12x10, DG 10/10

Package Quantity

25 pcs.

10 pcs.
