

Electrical

Rated voltage

600V

Rated current

25A

Wire range

20-12 AWG

Withstanding voltage

AC2500V/1Min

Mechanical

Torque

1. 2Nm (10. 5Lb. in)

Temperature range

-40°C—+105°C

Strip length

8. 0-10. 0mm

Dimention

Pitch

13. 1mm

Poles

1P

MATERIAL

Housing

PA66 UL94V-0


Terminal

Brass or Steel Tin plated


Screw

M4.0 Steel Zinc plated

订购方式:

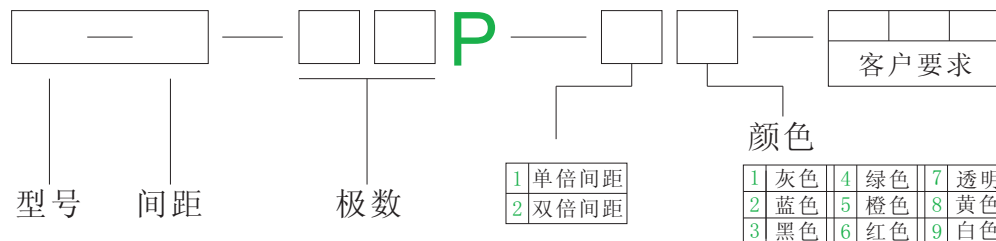

mm
(INCH)



THIROANGIF PROJECTION

NAME

PSB4