

Material:

Pitch:10mm

Poles:2P,3P

Screw:M3.5, Galvanized Steel

Terminal: Tin plated Brass

Housing:PA66,UL94V-0

Capability:

Rated Voltage: 750V


Rated Current:30A

Withstand Voltage:AC2000V/1Min

Wire Range:24-8AWG

Temperature Limit: -40°C-+105°C

Max Soldering:+250°C for 5 sec.

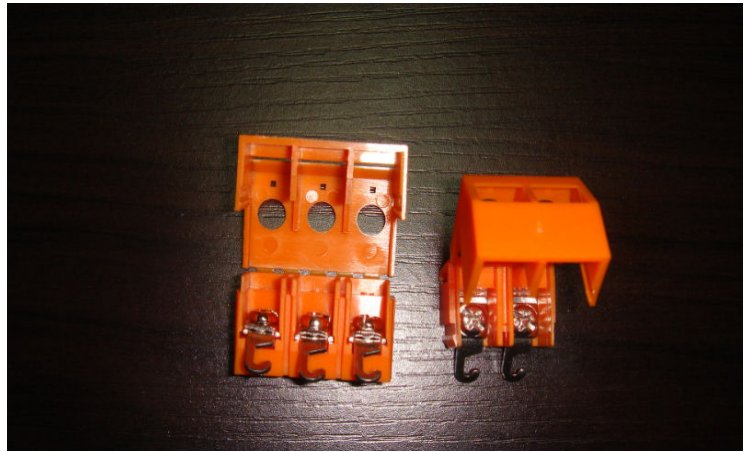

| Current Rating | Number Of Ways | a | b | c | d | e | a1 | b1 | c1 | d1 | e1 | Net Weight |
|----------------|----------------|----|----|----|----|----|----|----|----|----|----|------------|
| 16 | 2 | | | | | | | | | | | |
| 16 | 3 | | | | | | | | | | | |
| 30 | 2 | 20 | 23 | 19 | 20 | 23 | | | | | | 6.96g |
| 30 | 3 | | | | | | 30 | 23 | 19 | 20 | 23 | 10.4g |



Prodin Ferrite S.L.

CalleA, 27, 08620 Sant Vicenç dels Horts, Barcelona (Spain)

Tel.: +34 93 672 46 10

info@prodinferrite.com www.prodinferrite.com