
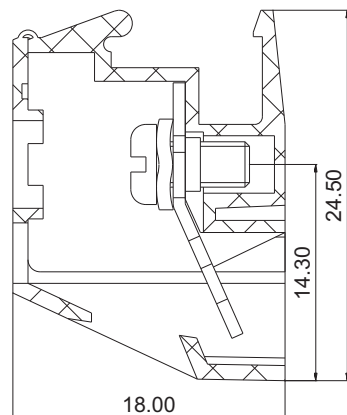


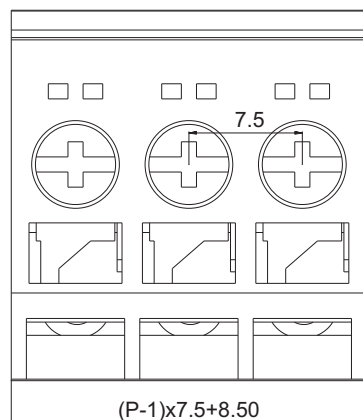

7005

PSA2.5


Safety Approval

Electrical

Standard

Rated voltage

Rated current

Wire range

Withstanding voltage



UL

IEC

300V

250V

10A

24A

24-14 AWG

2.5mm²

AC2000V/1Min

Mechanical

Torque

0.5Nm(4.4Lb. in)

Temp range

-40°C—+105°C

Strip length

8.0-10.0mm

Dimention

Pitch

7.5mm

Poles

2P 3P

MATERIAL

Housing


PA66 UL94V-0

Pin header

黄铜 镀锡

Screw

M3 钢 镀锌

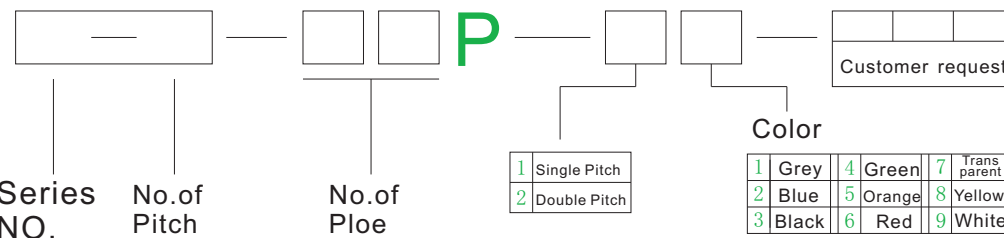HOW TO ORDER:


THROANGIF PROJECTION


NAME

PSA2.5