







Application	Power transformers
Material	Mn-Zn

Material Properties	Conditions	Symbol	Value	Unit
Initial Permeability	25°C, 10kHz, ≤ 0.25mT	μ_i	2300 ±20%	
Flux Density	25°C; 1000A/m	B_s	518	mT
	100°C; 1000A/m	B_s	410	mT
Coercive Field Strength	25°C; 10kHz	H_c	21	A/m
	100°C; 10kHz	H_c	12	A/m
Hysteresis Material Constant	25°C;	η_B	<1.0	10 ⁻⁶ mT
Curie Temperature	10kHz; ≤0.25mT	T_c	>210	°C
Density	25°C	ρ	4.8×10 ³	kg/m ³
Resistivity	25°C	ρ_{DC}	8	Ωm
Relative Core Losses	100°C; 100kHz; 100mT		≤ 45	kW/m ³
	100°C; 100kHz; 200mT		≤ 300	kW/m ³

**Prodin Ferrite S.L.**





Calle A, 27, 08620 Sant Vicenç dels Horts, Barcelona
(Spain) Tel.: +34 93 672 46 10

info@prodinferrite.com www.prodinferrite.com

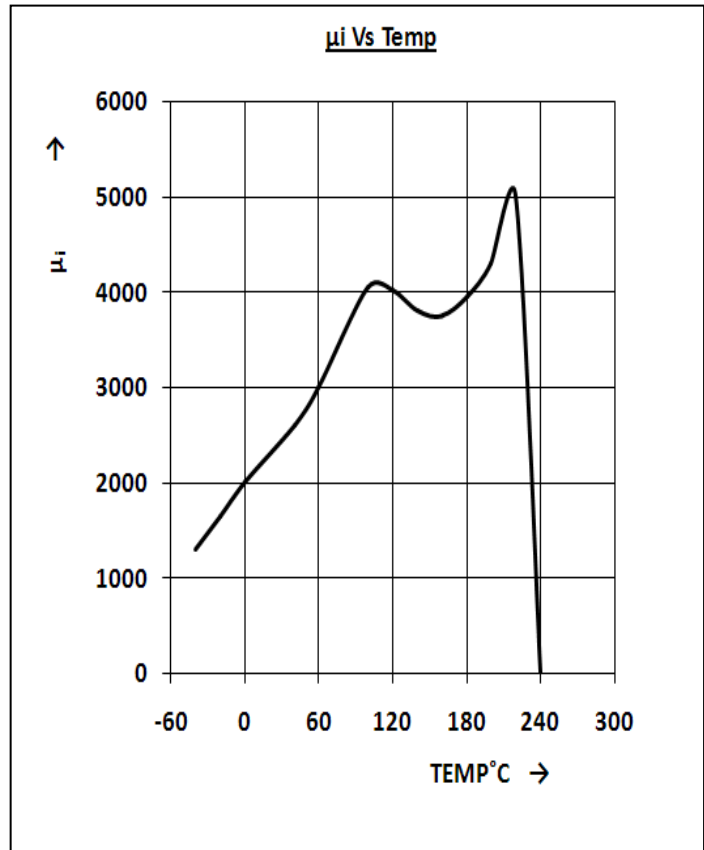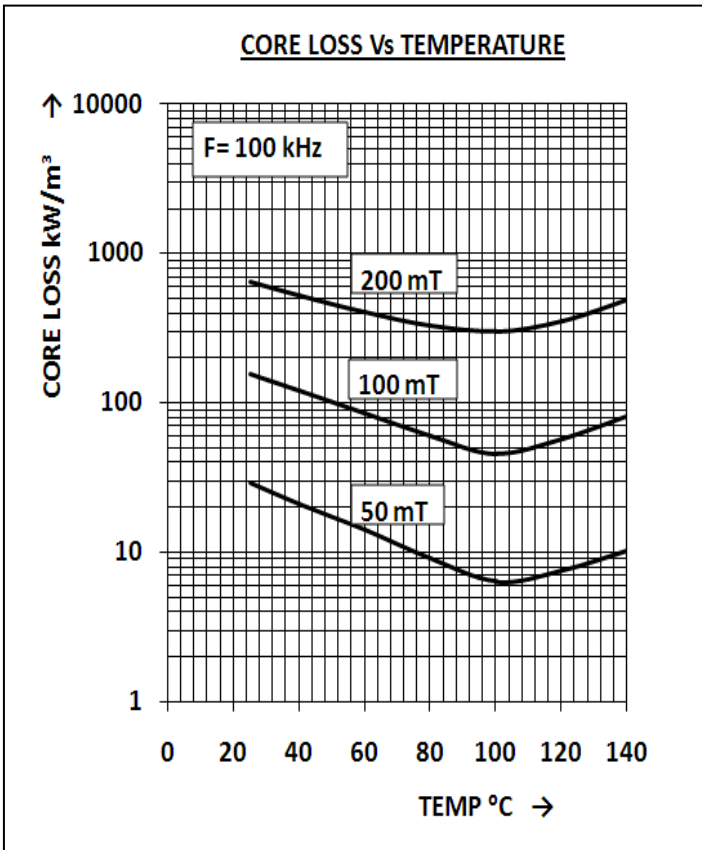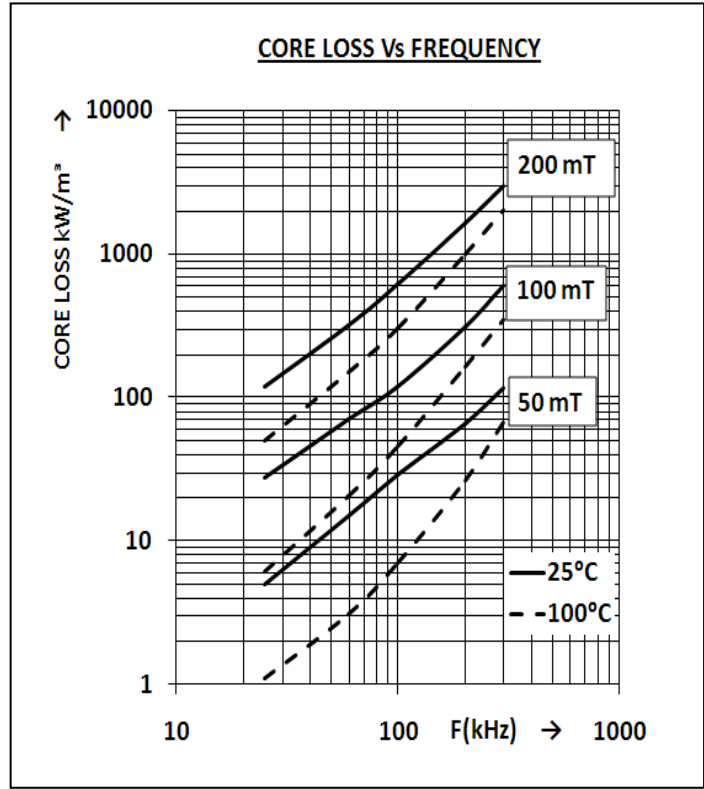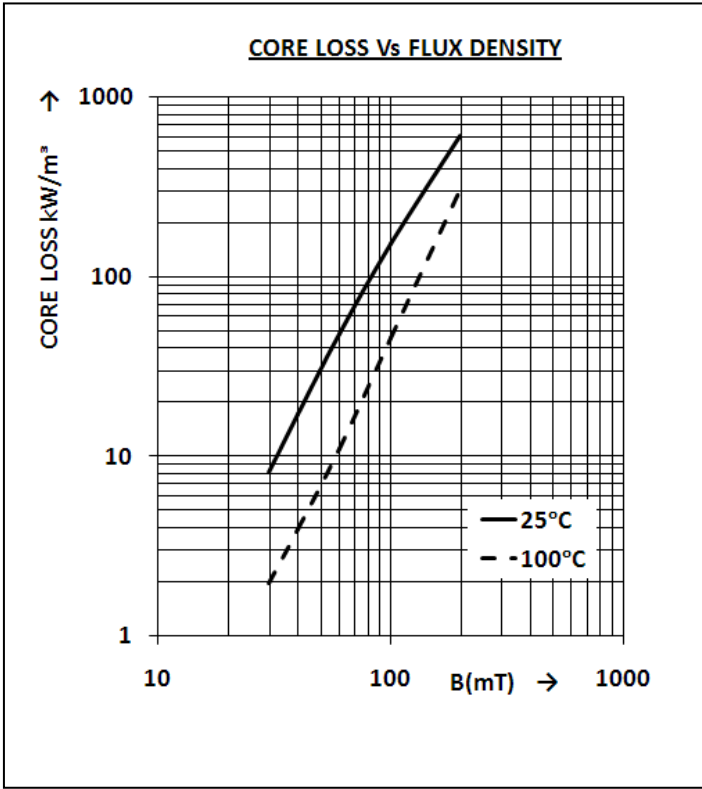

Date: 14-JUNE-2017

*Material data specified here have been derived from measurement on toroid core T2512

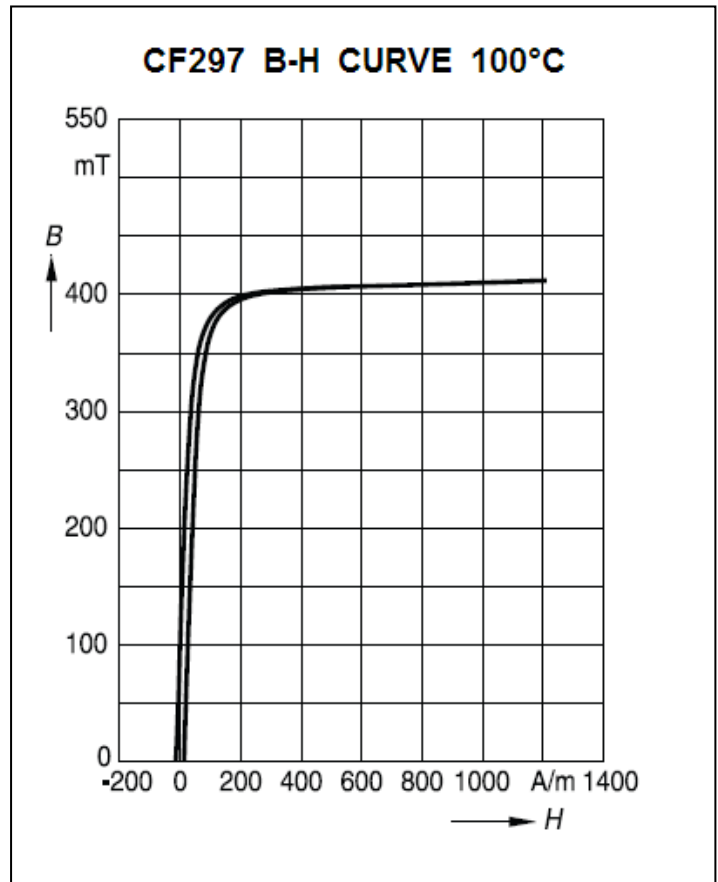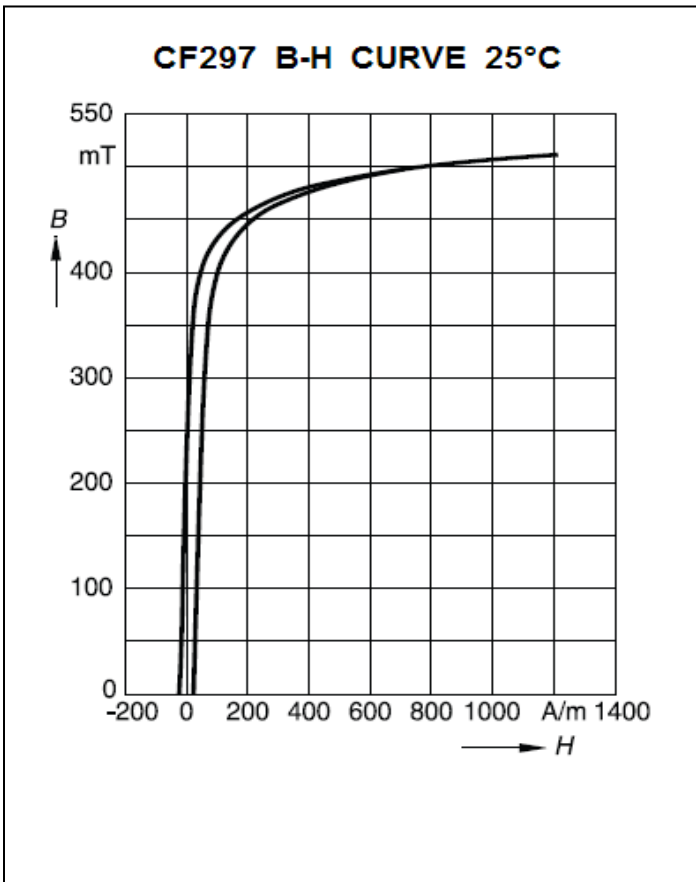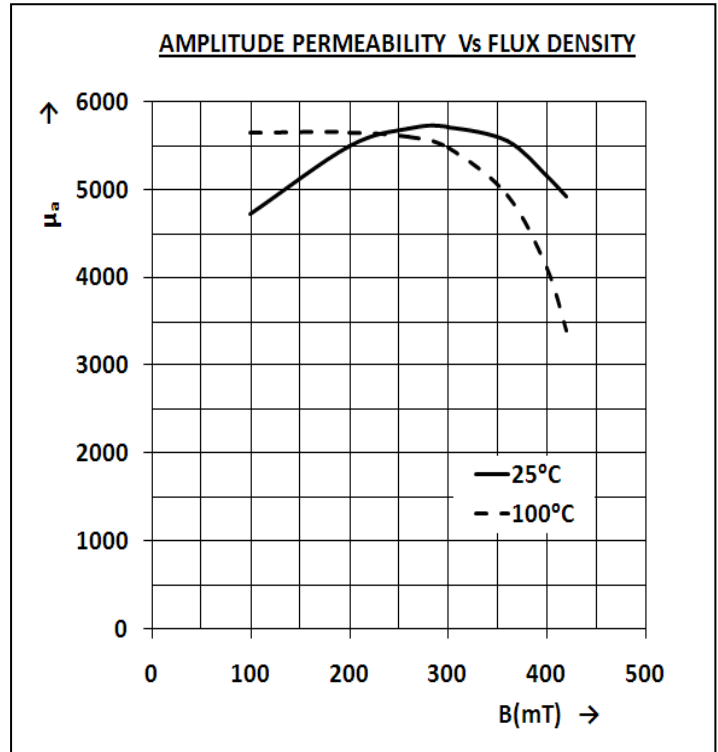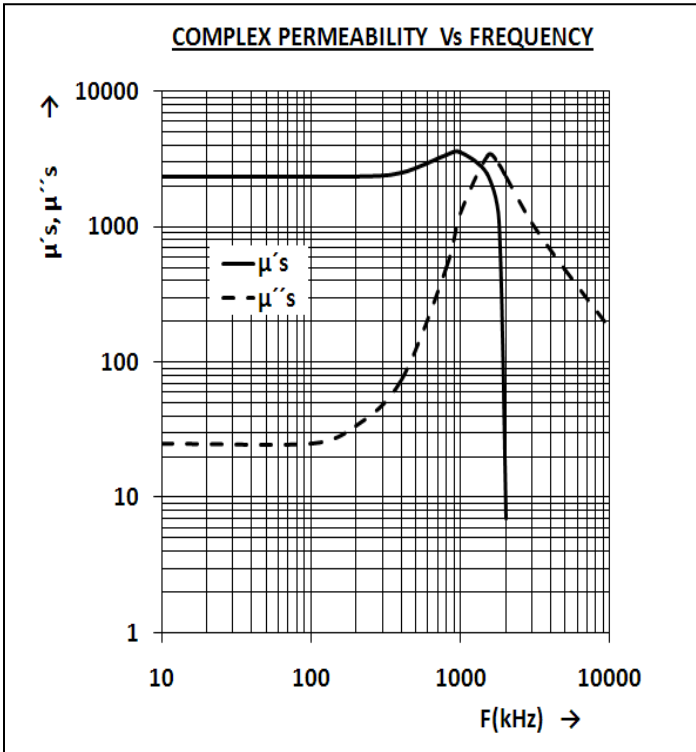

Date: 14-JUNE-2017

*Material data specified here have been derived from measurement on toroid core T2512