
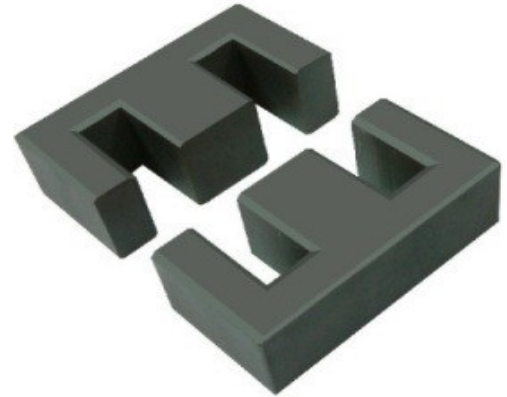


**Appearance & Shape:** To be free from any defect such as flow, burrs, unevenness etc; as per IEC standards**Effective parameters irrespective of material grade (per set)**

Parameter	Value	Unit
Effective Length (L_e)	67	mm
Effective Area (A_e)	60	mm ²
Effective Area (A_{Min})	49	mm ²
Effective Volume (V_e)	4000	mm ³
Approx. Weight (without gap)	21	g/set

**EE3007 Un-gapped (OL)****Test Conditions: 1kHz/1mT/CFR COIL,N=100/25°C**

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)/Set	P_v (W/set)	Ordering code
CF292	1800 ±20%	1650 +30%/-20%	≤0.48(100mT,100kHz,100°C)	CF292 EE3007 OL
CF139	2100 ±20%	1900 +30%/-20%	≤0.40(100mT,100kHz,100°C)	CF139 EE3007 OL
CF297	2300 ±20%	2100 +30%/-20%	≤0.36(100mT,100kHz,100°C)	CF297 EE3007 OL
CF124	2500 ±20%	2200 +30%/-20%	≤0.60 (200mT,25kHz,100°C)	CF124 EE3007 OL

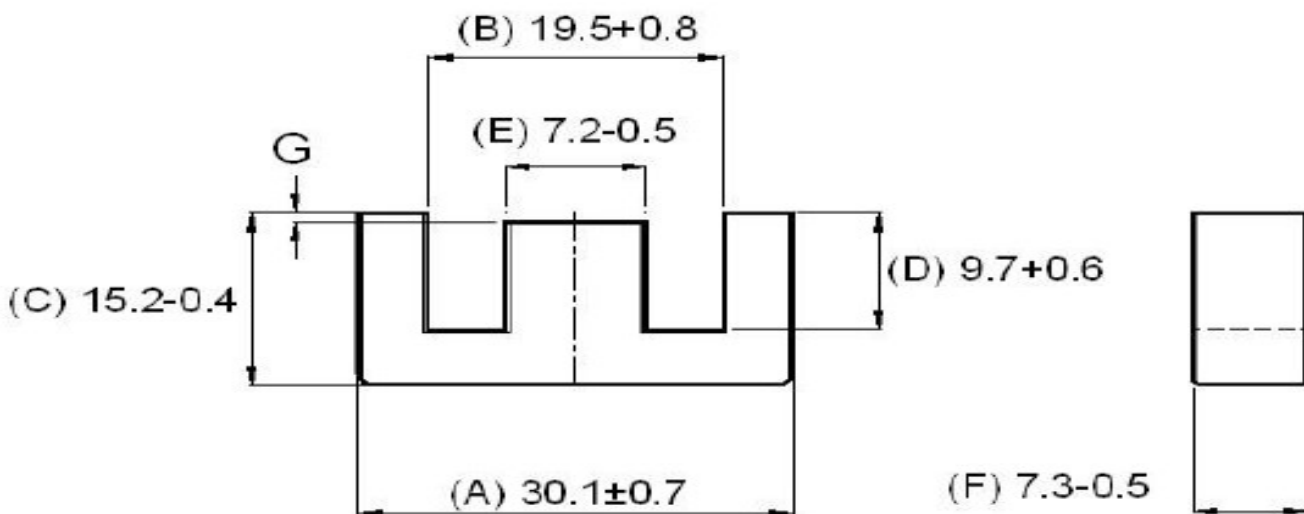

Remarks: Value of "G" is Zero (0) for Un-Gapped Cores, for Gapped Cores the value of "G" varies as per the Gap/AL value