




**Appearance & Shape:** To be free from any defect such as flow, burrs, unevenness etc; as per IEC standards

**Effective parameters irrespective of material grade (per set)**


Parameter	Value	Unit
Effective Length ( $L_e$ )	97.0	mm
Effective Area ( $A_e$ )	181.0	mm <sup>2</sup>
Effective Area ( $A_{Min}$ )	175.0	mm <sup>2</sup>
Effective Volume ( $V_e$ )	17600	mm <sup>3</sup>
Approx. Weight (without gap)	84	g/set

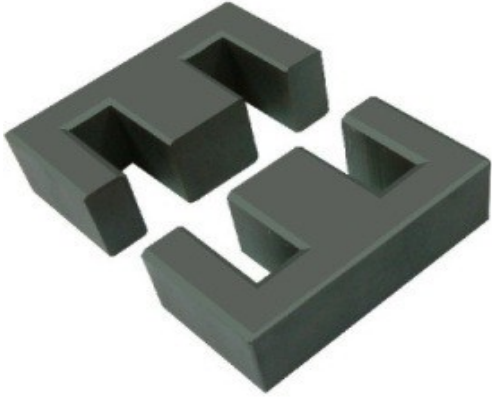

**EE4215 Un-gapped (OL)**

**Test Conditions: 1kHz/1mT/CFR COIL,N=100/25°C**

Material Grade	Initial Permeability ( $\mu_{iac}$ )	AL Value (nH)/Set	$P_v$ (W/set)	Ordering code
CF292	1800 ±20%	3600 +30%/-20%	≤2.11(100mT,100kHz,100°C)	CF292 EE4215 OL
CF139	2100 ±20%	4100 +30%/-20%	≤1.7(100mT,100kHz,100°C)	CF139 EE4215 OL
CF297	2300 ±20%	4400 +30%/-20%	≤1.58(100mT,100kHz,100°C)	CF297 EE4215 OL
CF124	2500 ±20%	4750 +30%/-20%	≤2.64 (200mT,25kHz,100°C)	CF124 EE4215 OL

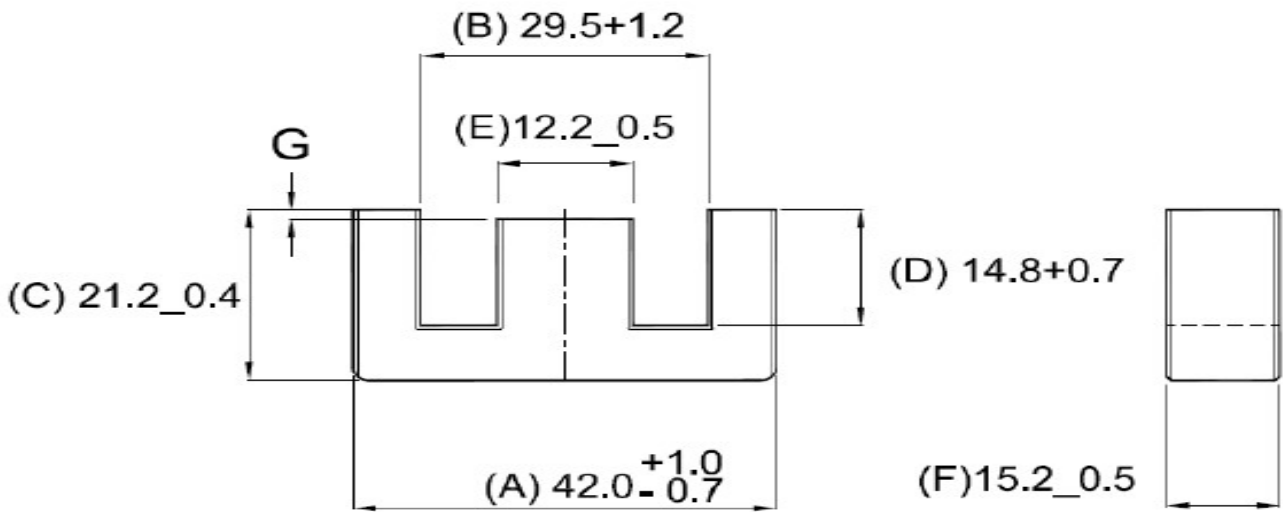

Remarks: Value of “G” is Zero (0) for Un-Gapped Cores, for Gapped Cores the value of “G” varies as per the Gap/AL value



**Prodin Ferrite S.L.**

Calle A, 27, 08620 Sant Vicenç dels Horts, Barcelona (Spain)  
Tel.: +34 93 672 46 10 - [FERRITES - info@prodinferrite.com](mailto:info@prodinferrite.com) [www.prodinferrite.com](http://www.prodinferrite.com)