



Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc; as per IEC standards

Effective parameters irrespective of material grade (per set)


Parameter	Value	Unit
Effective Length (L_e)	57	mm
Effective Area (A_e)	58	mm ²
Effective Area (A_{Min})	55.4	mm ²
Effective Volume (V_e)	3310	mm ³
Approx. Weight (without gap)	16	g/set



EFF2509 Un-gapped (OL)

Test Conditions: 1kHz/1mT/CFR COIL,N=100/25°C

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)/Set	P_v (W/set)	Ordering code
CF139	2100 ±20%	2050 +30%/-20%	≤0.33 (100mT,100kHz,100°C)	CF139 EFF2509 OL

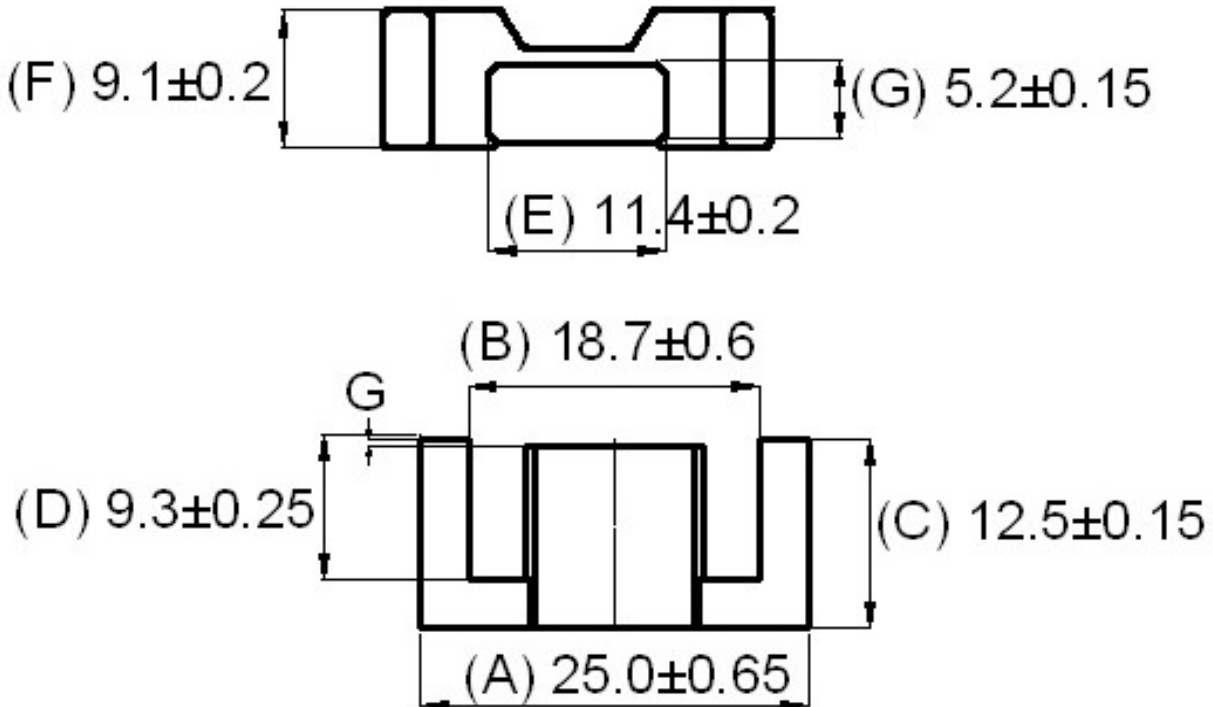

Remarks: Value of "G" is Zero (0) for Un-Gapped Cores, for Gapped Cores the value of "G" varies as per the Gap/AL value



Prodin Ferrite S.L.

Calle A, 27, 08620 Sant Vicenç dels Horts, Barcelona (Spain)

Tel.: +34 93 672 46 10

info@prodinferrite.com www.prodinferrite.com