



**PRODUCT DATA SHEET**

**Appearance & Shape:** To be free from any defect such as flow, burrs, unevenness etc; as per IEC standards

**Effective parameters irrespective of material grade (per set)**


Parameter	Value	Unit
Effective Length ( $L_e$ )	45.2	mm
Effective Area ( $A_e$ )	137.0	mm <sup>2</sup>
Effective Area ( $A_{Min}$ )	115.0	mm <sup>2</sup>
Effective Volume ( $V_e$ )	6190	mm <sup>3</sup>
Approx. Weight (without gap)	35.5	g/set



**P3019 Un-gapped (OL)**

**Test Conditions: 1kHz/1mT/CFR COIL,N=100/25°C**

Material Grade	Initial Permeability ( $\mu_{iac}$ )	AL Value (nH)/Set	$P_v$ (W/set)	Ordering code
CF292	1800 ±20%	5200 +30%/-20%	≤0.74(100mT,100kHz,100°C)	CF292 P3019 OL
CF139	2100 ±20%	5800 +30%/-20%	≤0.62(100mT,100kHz,100°C)	CF139 P3019 OL
CF297	2300 ±20%	6200 +30%/-20%	≤0.56 (100mT,100kHz,100°C)	CF297 P3019 OL
CF124	2500 ±20%	6600 +30%/-20%	≤0.92 (200mT,25kHz,100°C)	CF124 P3019 OL

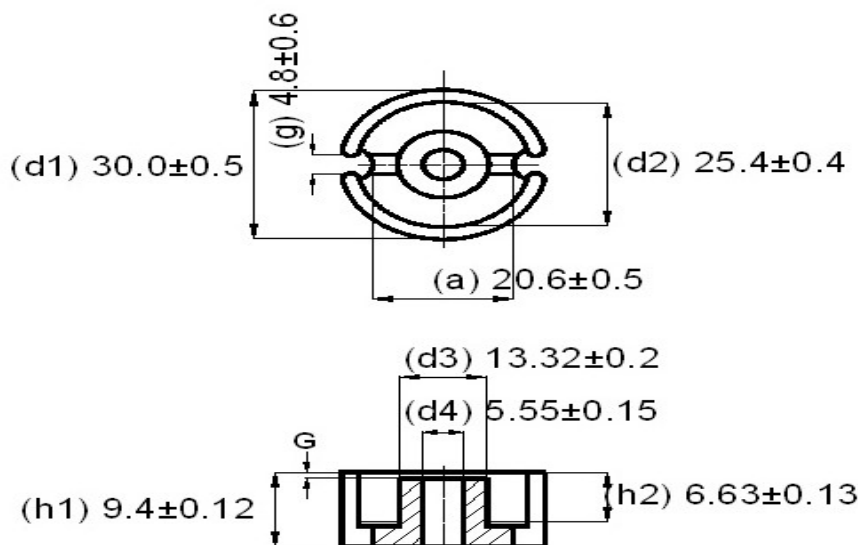

Remarks: Value of "G" is Zero (0) for Un-Gapped Cores, for Gapped Cores the value of "G" varies as per the Gap/AL value



**Prodin Ferrite S.L.**

Calle A, 27, 08620 Sant Vicenç dels Horts, Barcelona (Spain)

Tel.: +34 93 672 46 10

[info@prodinferrite.com](mailto:info@prodinferrite.com) [www.prodinferrite.com](http://www.prodinferrite.com)