


MODELOS: UI-60 / UI-66

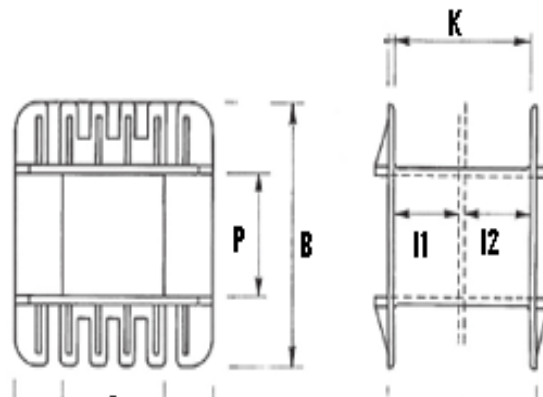

UI-60 (CIRCUITO 100X100)

Tolerancia: ± 0.2

MOD	REF	C	P	A	B	H	K	L1	L2	S	RANURAS
20X20X60 PH SS	220001	20,8	21,0	39,0	44	59,0	56,6				
20X20X60 PH DS	220003	20,8	21,0	39,0	44	59,0	56,6	27,5	27,5	1,5	
20X30X60 PH SS	220005	20,8	30,8	39,0	53	59,0	56,6				4 + 4
20x30x60 PH DS	220007	20,8	30,8	39,0	53	59,0	56,6	27,5	28	1,5	
20X40X55 PH SS	220009	20,8	40,0	39,0	53	59,0	56,6				4 + 4
20x50x60 PH SS	220018	20,8	50,0	39,0	73	59,0	56,6				

UI-66 (CIRCUITO 112X132)

Tolerancia: ± 0.2

MOD	REF	C	P	A	B	H	K	L1	L2	S	RANURAS
22x30x66 PH SS	220010	23,8	30,0	52,0	63,0	65,7	62,5			1,6	
22X40X66 PH SS	220011	23,8	40,0	52,0	68,0	65,7	62,5			1,6	
22X45X66 PH SS	220012	23,8	45,0	52,0	78,0	65,7	62,5			1,6	
22X50X66 PH SS	220013	23,8	50,0	52,0	88,0	65,7	62,5			1,6	



Prodin Ferrite S.L.

Calle A, 27, 08620 Sant Vicenç dels Horts, Barcelona
(Spain) Tel.: +34 93 672 46 10

info@prodinferrite.com www.prodinferrite.com