
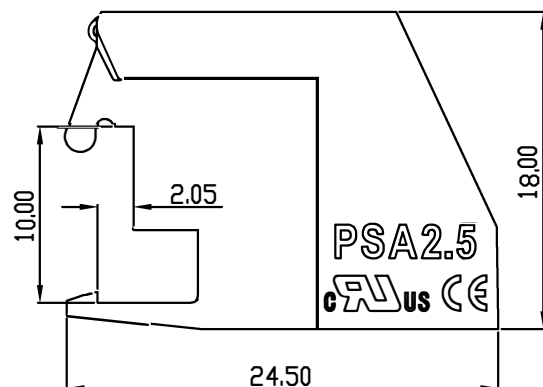


linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

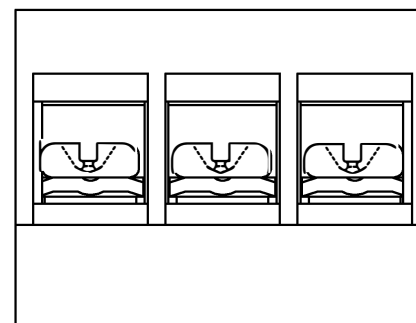

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A			CLF	21.10.16

UL/CUL				
UL/CUL Technical Data				
Use Group		B	C	D
Rated Voltage [V]		300	-	-
Rated Current [A]		10	-	-
Wire Range		24-14		
Solid/Stranded [AWG]				
IEC				
IEC Technical Data				
Rated Voltage [V]		250		
Rated Current [A]		24		
Withstanding Voltage		2000V/1Min		
Conductor cross section Solid/ flexible [mm ²]		2.5		
Material				
Insulation Material		PA66		
Inflammability		UL94V-0		
Contactor Material		Copper alloy		
Contactive Coating		Tin plating		
Other Data				
Pitch [mm]		7.5		
Poles [P]		02/03		
Stripping Length [mm]		8-10		
Screw/ Torque(Max) [N.m]		M3/0.5		
Operating temperatur [°C]		-40~+105		
Pin Dimensions [mm]		-		
PCB Hole Diameter [mm]		-		

DES.	SJD	DATE	21.10.16	UNITS	mm	SIZE	A4 SCALE 1:1	/THIRD ANGLE PROJECTION		REV	A
CHK.	BY	DATE	21.10.16	 Prodin Ferrite S.L. Calle A, 27, 08620 Sant Vicenç dels Horts, Barcelona (Spain) Tel.: +34 93 672 46 10 info@prodinferrite.com www.prodinferrite.com						REV	A
APP.	CLF	DATE	21.10.16					TITLE	PSA2.5-7.5		