
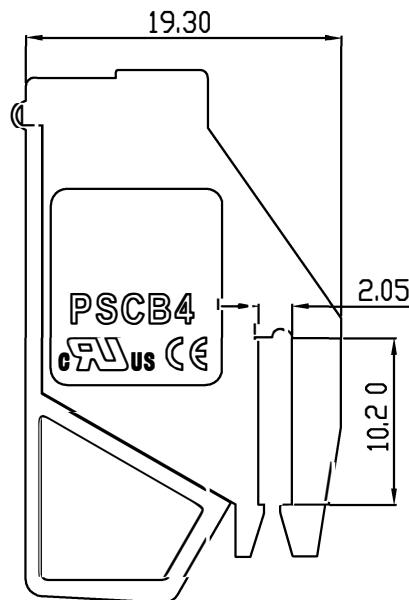
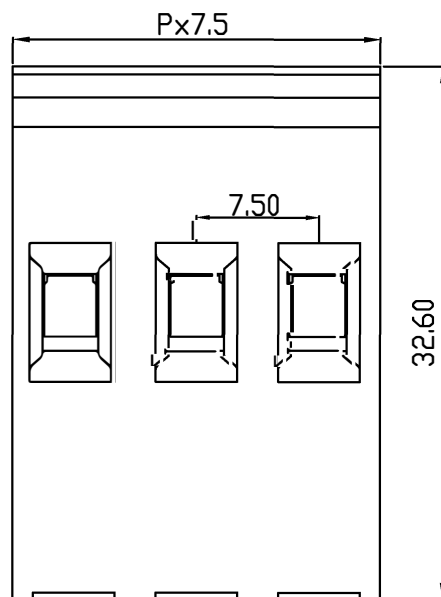


linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

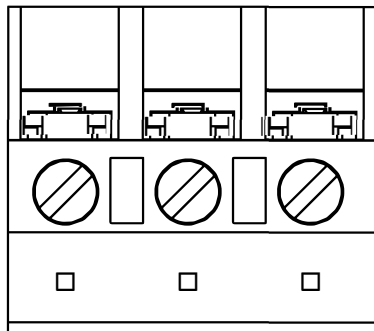

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A			CLF	21.10.16

UL/CUL			
UL/CUL Technical Data 			
Use Group		B	C D
Rated Voltage [V]	300	-	-
Rated Current [A]	20	-	-
Wire Range Solid/Stranded [AWG]	20-10		
IEC 			
IEC Technical Data			
Rated Voltage [V]	750		
Rated Current [A]	32		
Withstanding Voltage	2500V/1Min		
Conductor cross section	4.0		
Solid/ flexible [mm²]			
Material			
Insulation Material	PA66		
Flammability	UL94V-0		
Contact Material	Copper alloy		
Contactive Coating	Tin plating		
Other Data			
Pitch [mm]	7.5		
Poles [P]	01、02、03		
Stripping Length [mm]	8-10		
Screw/ Torque(Max) [N.m]	M3/0.5		
Operating temperatur [°C]	-40~+105		
Pin Dimensions [mm]	-		
PCB Hole Diameter [mm]	-		

DES.	SJD	DATE	21.10.16	UNITS	mm	SIZE	A4	SCALE	1:1	/THIRD ANGLE PROJECTION		REV	A
CHK.	BY	DATE	21.10.16	 Prodin Ferrite S.L. Calle A, 27, 08620 Sant Vicenç dels Horts, Barcelona (Spain) Tel.: +34 93 672 46 10 info@prodinferrite.com www.prodinferrite.com								REV	A
APP.	CLF	DATE	21.10.16							TITLE		PSCB4-7.5	