


Equivalente a borna
AVK95B

PAK 50-70

Width: 31,80 mm

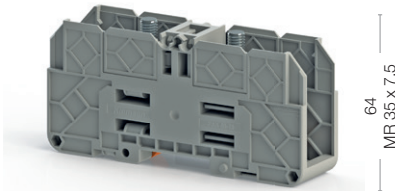

64
MR 35 x 7,5


132

Cat No:

313 049

PAK 50-70 KK

Width: 31,80 mm

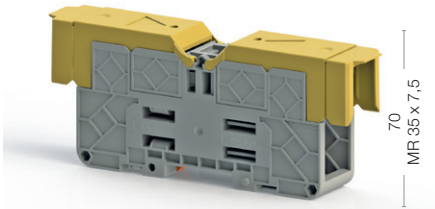

70
MR 35 x 7,5

170

Cat No:

313 059



Electrical Ratings
CE (EN 60947-7-1 / EN 60947-7-2)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Connection Data
Connection in acc. with standard
Cable lugs DIN 46234
Cable lugs DIN 46235
Cable lugs DIN 46234
Cable lugs DIN 46235
Bolt
Tightening torque, min
Tightening torque max

Protection Cover	
	Yellow
	Blue
	Yellow-Green

Comb Connection


Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

Package Quantity

Voltage, V ~	Current, A	Cross-Section
1000	192	2,5-95 mm²

DIN 46234 / DIN 46235
2,5 - 95 mm²
16 - 70 mm²
14 - 3/0 AWG
6 - 2/0 AWG
M 8
6 Nm
12 Nm

Type	Order No	Qty.
COVER PAK 50-70	466 183	10
	466 181	
	466 182T	

Type	Order No	Qty.
UK 70/2	472 012	5
UK 70/3	472 013	5

8/3
1/NA
IP 20
DG 10/6, D-NS 12x10, SLF-P1W

10 pcs.

Voltage, V ~	Current, A	Cross-Section
1000	192	2,5-95 mm²

DIN 46234 / DIN 46235
2,5 - 95 mm²
16 - 70 mm²
14 - 3/0 AWG
6 - 2/0 AWG
M 8
6 Nm
12 Nm

Type	Order No	Qty.

Type	Order No	Qty.
UK 70/2	472 012	5
UK 70/3	472 013	5

8/3
1/NA
IP 20
DG 10/6, D-NS 12x10, SLF-P1W

10 pcs.
