


Equivalente a borna
AVK150B

PAK 95-150

Width: 41 mm

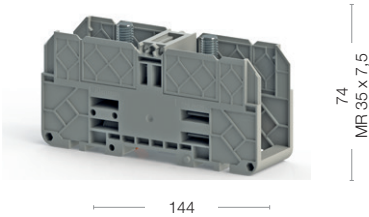


Cat No:

313 089

PAK 95-150 KK

Width: 41 mm

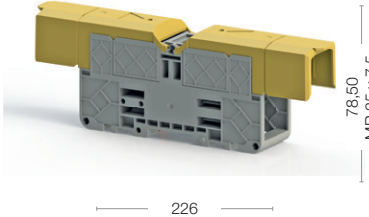

Cat No:

313 099



Electrical Ratings	
CE (EN 60947-7-1 / EN 60947-7-2)	
UL	
VDE (IEC 60947-7-1)	
CSA	
ATEX	
Connection Data	
Connection in acc. with standard	
Cable lugs DIN 46234	
Cable lugs DIN 46235	
Cable lugs DIN 46234	
Cable lugs DIN 46235	
Bolt	
Tightening torque, min	
Tightening torque max	
Protection Cover	
	Yellow
	Blue
	Yellow-Green
Comb Connection	
	
Technical Data	
Rated Impulse Voltage / Pollution severity	
Insulation material group / Gauge pin code according to IEC 60947-1	
Protection class / Protection conductor type	
Marking Tags (Dekafix)	
See pages 326-333 for a list of Dekafix	
Package Quantity	

Voltage, V ~	Current, A	Cross-Section
1000	309	6-150 mm²
DIN 46234 / DIN 46235		
6 - 150 mm²		
16 - 150 mm²		
10 AWG - 300 kcmil		
6 AWG - 300 kcmil		
M 10		
10 Nm		
20 Nm		
Type	Order No	Qty.
COVER PAK 95-150	466 193	10
	466 191	
	466 192T	
Type	Order No	Qty.
UK 150/2	472 022	5
UK 150/3	472 023	5
8/3		
1/NA		
IP 20		
DG 10/6, D-NS 12x10, D-NS 14x10, SLF-P1W		
5 pcs.		

Voltage, V ~	Current, A	Cross-Section
1000	309	6-150 mm²
DIN 46234 / DIN 46235		
6 - 150 mm²		
16 - 150 mm²		
10 AWG - 300 kcmil		
6 AWG - 300 kcmil		
M 10		
10 Nm		
20 Nm		
Type	Order No	Qty.
Type	Order No	Qty.
UK 150/2	472 022	5
UK 150/3	472 023	5
8/3		
1/NA		
IP 20		
DG 10/6, D-NS 12x10, D-NS 14x10, SLF-P1W		
5 pcs.		