


PAK Series


PAK 185-240

Width: 55 mm

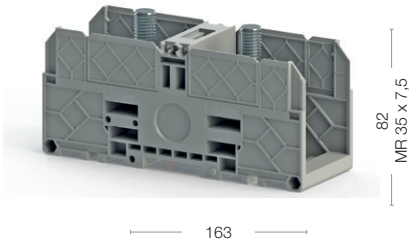

PAK 185-240 KK

Width: 55 mm

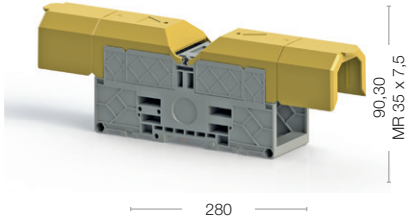

Equivalente a borna
AVK240B

Cat No:

313 129

Cat No:

313 139



Electrical Ratings
CE (EN 60947-7-1 / EN 60947-7-2)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Connection Data
Connection in acc. with standard
Cable lugs DIN 46234
Cable lugs DIN 46235
Cable lugs DIN 46234
Cable lugs DIN 46235
Bolt
Tightening torque, min
Tightening torque max

Protection Cover	
	Yellow
	Blue
	Yellow-Green

Comb Connection


Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

Package Quantity

Voltage, V ~	Current, A	Cross-Section
1000	415	10-240 mm²

Voltage, V ~	Current, A	Cross-Section
1000	415	10-240 mm²

Type	Order No	Qty.
COVER PAK 185-300	466 203	10
	466 201	
	466 202T	

Type	Order No	Qty.
UK 240/2	472 032	5
UK 240/3	472 033	5

Type	Order No	Qty.
8/3		
1/NA		
IP 20		
DG 10/6, D-NS 12x10, D-NS 14x10, SLF-P1W		

Type	Order No	Qty.
5 pcs.		

Voltage, V ~	Current, A	Cross-Section
1000	415	10-240 mm²

Voltage, V ~	Current, A	Cross-Section
1000	415	10-240 mm²

Type	Order No	Qty.

Type	Order No	Qty.
UK 240/2	472 032	5
UK 240/3	472 033	5

Type	Order No	Qty.
8/3		
1/NA		
IP 20		
DG 10/6, D-NS 12x10, D-NS 14x10, SLF-P1W		

Type	Order No	Qty.
5 pcs.		