




Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc; as per IEC standards

Effective parameters irrespective of material grade (per set)


Parameter	Value	Unit
Effective Length (L_e)	285.5	mm
Effective Area (A_e)	792.7	mm ²
Effective Area (A_{Min})	757.9	mm ²
Effective Volume (V_e)	226230	mm ³
Approx. Weight (without gap)	1100	g/set

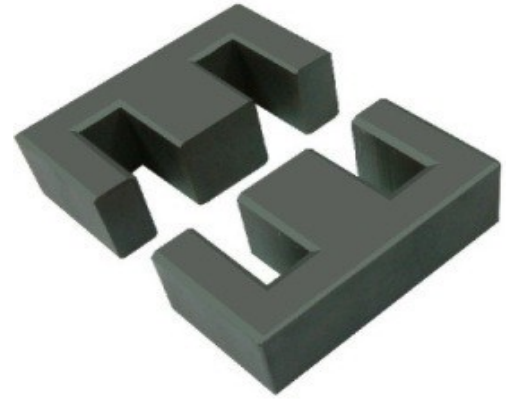

EE12820 Un-gapped (OL)

Test Conditions: 1kHz/1mT/CFR COIL,N=100/25°C

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)/Set	P_v (W/set)	Ordering code
CF292	1800 ±20%	5700 +30%/-20%	≤27.1 (100mT,100kHz,100°C)	CF292 EE12820 OL
CF139	2100 ±20%	6400 +30%/-20%	≤22.6(100mT,100kHz,100°C)	CF139 EE12820 OL
CF297	2300 ±20%	6800 +30%/-20%	≤20.3 (100mT,100kHz,100°C)	CF297 EE12820 OL

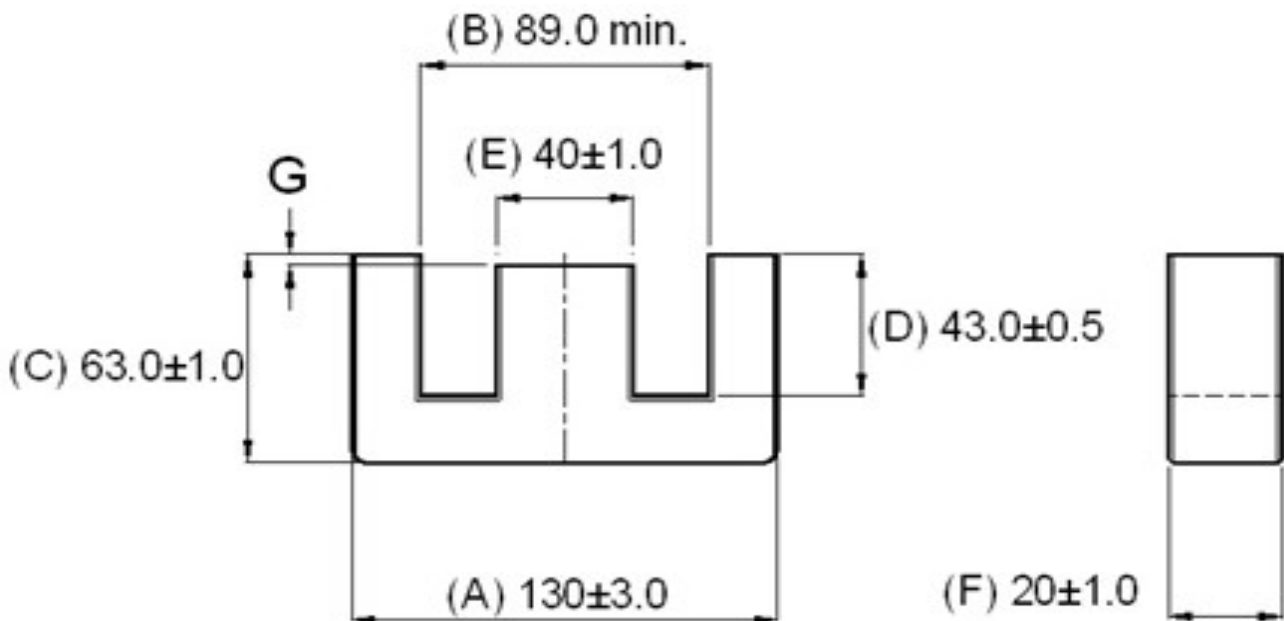

Remarks: Value of "G" is Zero (0) for Un-Gapped Cores, for Gapped Cores the value of "G" varies as per the Gap/AL value

